




GONDOR

INNOVATION MAKES VALUES

MORE THAN 18 YEARS EXPERIENCE

FOOD MACHINERY ONE-SHOP PURCHASING





Henan Gondor Machine Co., Ltd is a leading food machines manufacturer which is located in Zhengzhou, China.

Our company possesses professional senior managerial personnel, outstanding engineering technicians, product R&D personnel, well-trained skilled workers, enthusiastic sale team and after service team.

We produce standard power personal household food equipment to industrial automatic food production line including ice cream machine, dehydrator drying machine, fruit & vegetable processing machines, meat processing machines, grain & nuts processing machines, bakery & pastry machine, snack machines, packing machines, etc. All our products have one year guarantee for core components and free spare parts during warranty duration.

Owing to good service, a variety of high quality products, competitive prices and on time delivery, we have got a good reputation among the customers especially from Poland, Romania, Belgium, France, Russia, USA, Mexico, Brazil, Chile, Peru, Thailand, Philippine, Middle East and Kenya, etc.

We appreciate your new ideas and challenges and would like to accept OEM and ODM orders.

Of course if you are interested in any of our current machines, please do not hesitate to contact with us and we hope to build long-term, steady and win-win business relationship with you.





www.gondormachine.com



About us



Gondor factory




Gondor office



Gondor exhibition



Customer visit

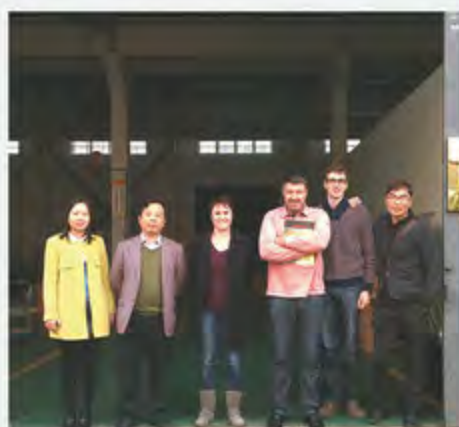

Snack Machines



Automatic cake batter machine

- ✓ Precision CNC
- ✓ Efficient and labor-saving
- ✓ Easy to use
- ✓ Imported core accessories



GD-400



GD-600



Product Description

This machine apply completely PLC and touch screen. This perfect combination makes it easy to operate. The cake grouting performance is stable quantity of grouting can be adjusted according to customers' request.


Technical Parameters

Model	GD-400	GD-600
Weight	350kg	550kg
Dimension	1700×1000×1300mm	1700×1200×1300mm
Output	4-6disk/min	5-8disk/min
Voltage	220V/50HZ(single phase)	



Bread Production Line

- ✔ Multifuction
- ✔ High Automation
- ✔ Precise Adjustment
- ✔ Simple Operation

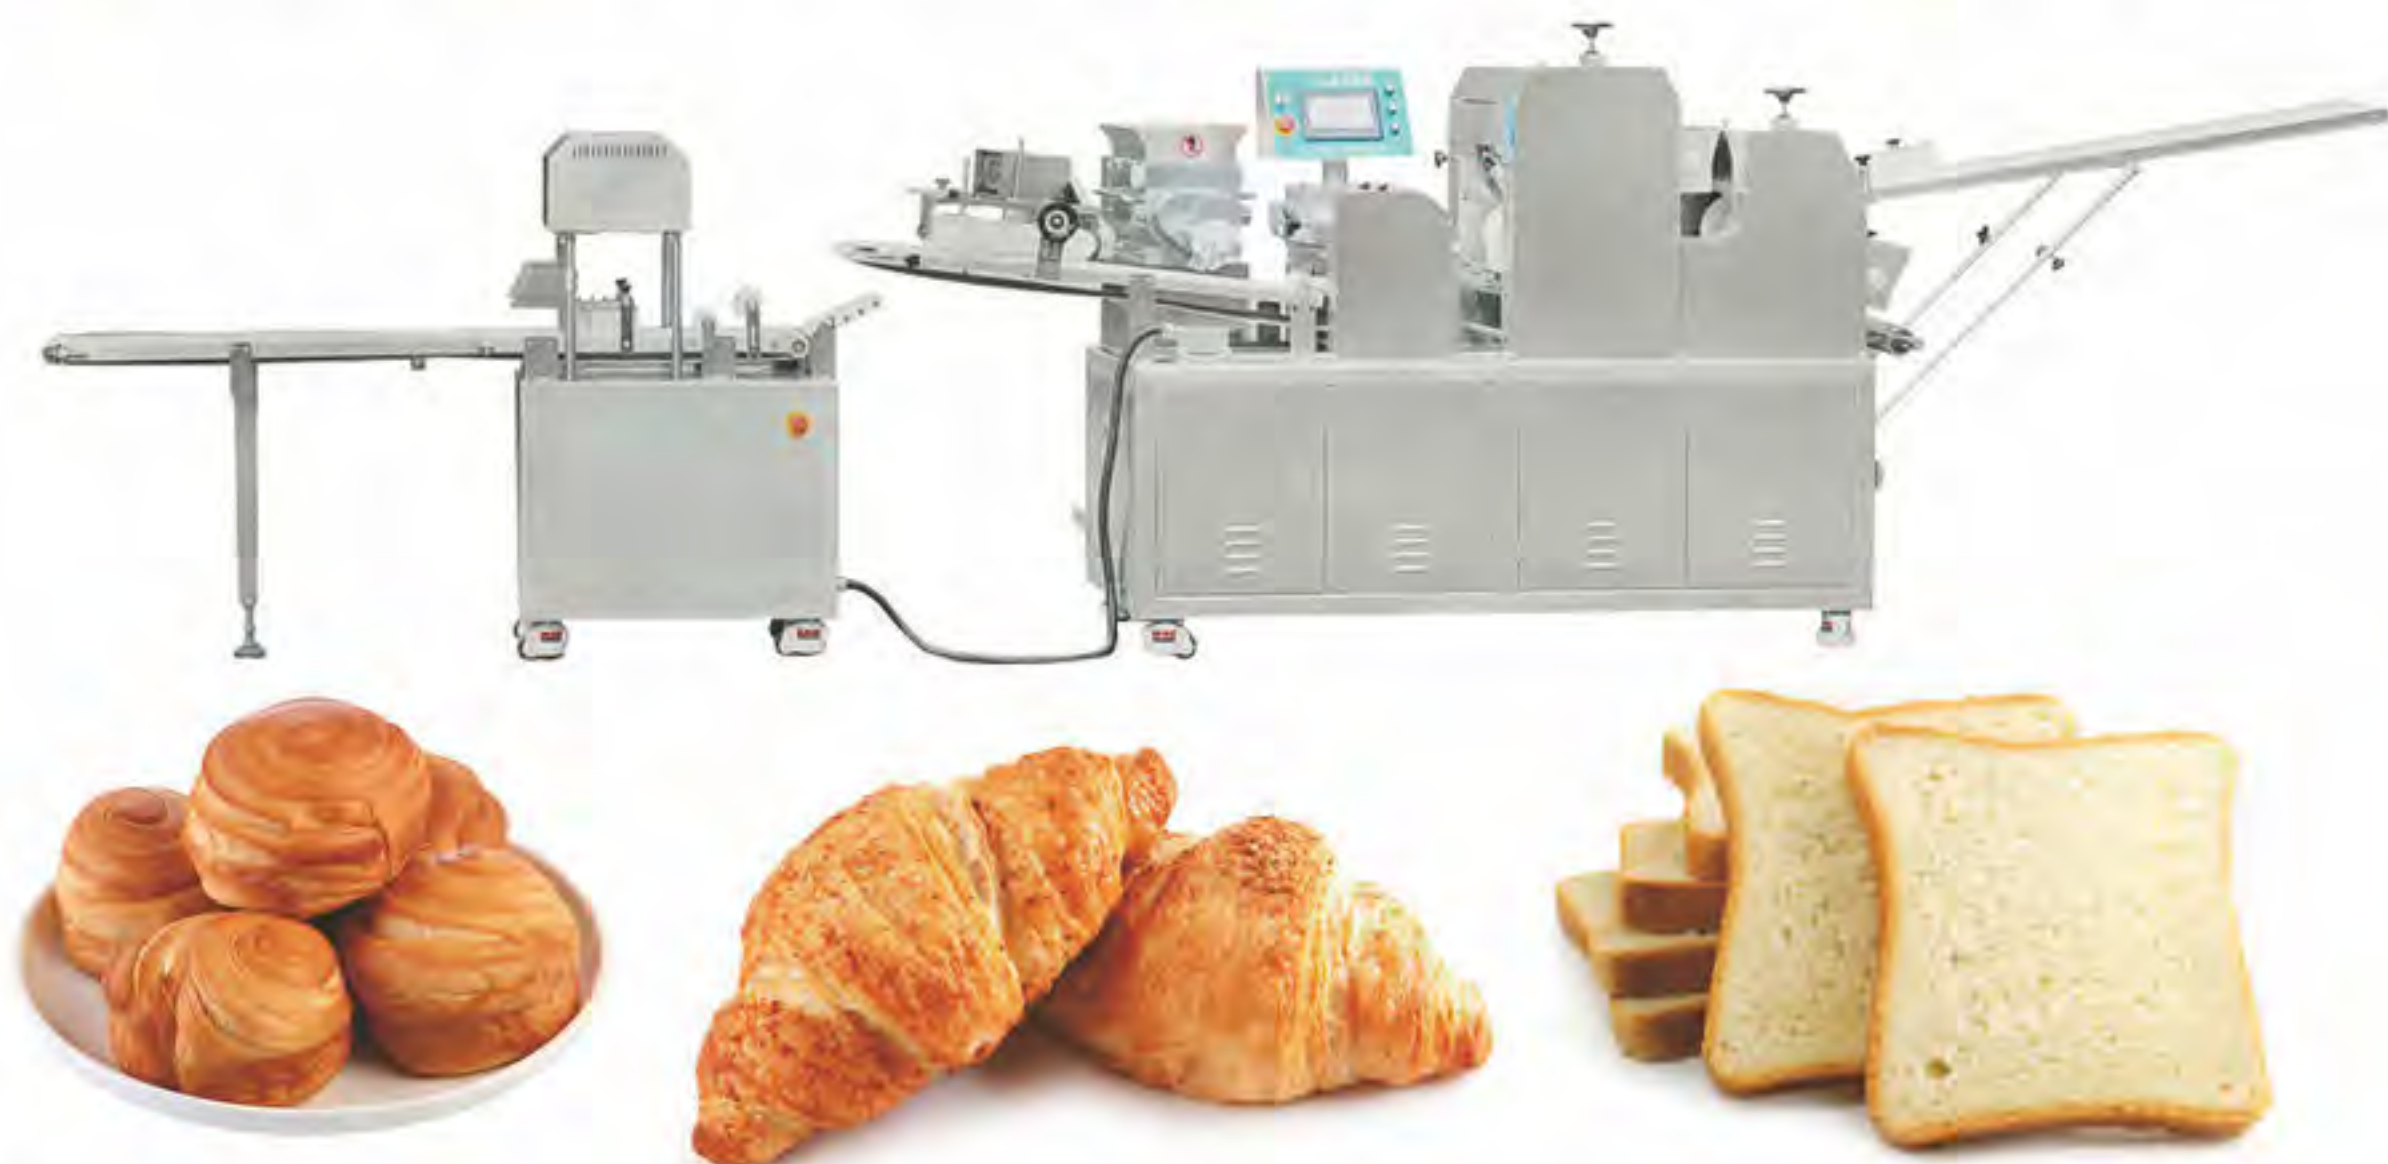

Product Description

The bread machine can be matched with different machines, devices, and molds to produce more than 100 kinds of bread. It's a multi-functional production line. The bread shape and size is adjustable as needs by changing parameter on the touch screen. We are a professional enterprise with production and trade integration, R&D, production, sales, and after-sales. Whatever the single machine, production line, or other production solutions can be provided according to your needs.

Technical Parameters

Name	Multi-function bread production line
Material	304 stainless steel
Color	Silver
Shape	Irregular
Product weight	30-300g
Capacity	30-280Pcs/min
Roller width	80-300
Voltage	220V
Power	4 KW
Other Property	Food grade standard

Biscuit Making Machine

- ✓ Quick setting
- ✓ Various molds
- ✓ Easy to operate



Product Description

This cotton candy machine Floss Sugar Machine is suitable for homes, small stalls, dessert shops, hotels, exhibitions and other places. the machine is also used for Birthday Parties, Graduation Parties, Festivals, Carnivals and Fairs.

Technical Parameters

Model	GD-300	GD-500
Capacity	300kg/h	500kg/h
Size	1030*550*1150mm	1030*550*1150mm
Weight	95kg	120kg



Cookie Molding Machine

- ✓ Automatic forming
- ✓ Mold can be customized
- ✓ One person can operate



Product Description

Biscuit make machine is used for rolling printing of biscuit dough and demolding of biscuits. The mixed biscuit dough is placed in the feeding hopper, and biscuit make machine can produce biscuits of different shapes and weights. Biscuit make machine can also provide consistent results, ensuring that each biscuits is perfectly formed and baked to perfection. In addition, biscuit molds of different sizes and shapes can also be customized.

Technical Parameters

Model	GD-400	GD-600	GD-800	GD-1000	GD-BG400
Yield	100-200 kg/h	250-300kg/h	500-600kg/h	800-1000kg/h	50-180kg/h
Power	1.5 kw	2.2 kw	4.5 kw	5.5 kw	2.2 kw
Voltage	380-220v /50Hz	380-220v /50Hz	380-220v /50Hz	380-220v /50Hz	380v/50hz
Baking tray size	400*600mm	600*600mm	800*600mm	1000*600mm	400*600mm
Equipment	2350*850*1350	2350*1050*1350	2500*1350*1350	2500*1550*1600	2900*850*1350
Weight	500 kg	850 kg	1300kg	1500 kg	580 kg

Desktop Ice Cream Machine

- ✓ Small size
- ✓ Low energy consumption
- ✓ Large output
- ✓ Intelligent control



Product Description

Our ice cream machine, constructed of two food grade hoppers, it can be used to make three flavors of ice cream, including two single flavors and one mix flavor with stunning mix color. you can put ice cream machine on your table for it taking little spaces. It is very suitable for commercial usage.

Technical Parameters



XQ-8L/10L



XQ-16L/18L



XQ-22L/30L



CY-826T



BQL-7255T

Model	Cylinder capacity	Output	Size	Power	Weight	Voltage
XQ-8L	8.5LX1	8-10L/H	250X600X680mm	1100w	46kg	220V50HZ
XQ-10L	8.5LX1	10-12L/H	250X600X680mm	1200W	46kg	220V50HZ
XQ-16L	8.5LX1	16-22L/H	410X700X755mm	1800W	80kg	220V50HZ
XQ-18L	8.5LX1	22-28L/H	410X700X755mm	2000W	80kg	220V50HZ
XQ-22LT	7.2LX2	22-28L/H	450X700X755mm	2100W	90kg	220V50HZ
XQ-30LT	7.2LX2	30-45L/H	450X700X755mm	2500W	120kg	220V50HZ
CY-826T	6Lx2	20L-28L/H	540x710x780mm	2200W	96.5kg	220V50HZ
BQL-7255T	5.8Lx2	18L/H	520X695X750mm	2200W	90kg	220V50HZ



Vertical Ice Cream Machine

- ✓ Rapid prototyping
- ✓ Upgraded high expansion technology
- ✓ One-key cleaning



Product Description

Our ice cream machine, constructed of two food grade hoppers, it can be used to make three flavors of ice cream, including two single flavors and one mix flavor with stunning mix color.

Technical Parameters



XQ-20L/25L



XQ-22L



XQ-30L



XQ-40X



XQ-60S



BQL-830B

Model	Cylinder capacity	Output	Size	Power	Weight	Voltage
XQ-20L	7.2LX2	20-25L/H	540x675x1300mm	1100w	46kg	220V50HZ
XQ-25L	7.2LX2	25-30L/H	540x675x1300mm	1200W	46kg	220V50HZ
XQ-22L	7.2LX2	22-28L/H	540X650X1300mm	1800W	80kg	220V50HZ
XQ-30L	7.2LX2	22-28L/H	540X700X1350mm	2000W	80kg	220V50HZ
XQ-40X	9LX2	30-35L/H	580x780x1450mm	2100W	90kg	220V50HZ
XQ-60s	9LX2	40-50L/H	540x740x1380mm	2500W	120kg	220V50HZ
BQL-830B	5.8Lx2	25L/H	540X615X1410mm	2200W	96.5kg	220V50HZ

Hard Ice Cream Machine

- ✓ Various stirring shafts
- ✓ Visual window
- ✓ High quality compressor
- ✓ Automatic discharge design



H16T



CY-618



CY-116



BQ12T/BQ18T



H16C



H32C



CY-N28/CY-N45
CY-N60/CY-N80



BQ26/BQ32/BQ40

Product Description

The main accessory compressor in the hard ice cream machine adopts a big brand compressor, and the motor is also a pure copper core motor, so that the machine can maintain stable working performance.

Technical Parameters

Model	Size	Weight	Voltage	Power	Cylinder capacity	Yield(L/H)
H16T	550*500*750MM	70KG	220/110V	1300KW	4.5L	12-16
CY-618	530*500*700MM	60KG	220V	1400KW	4.3L*1	16-20
CY-116	525*490*640MM	60KG	220V	1400KW	4.3L*1	16-20
BQ12T	500*705*800MM	100KG	220V	1000KW	5.1L*1	10-14
BQ18T	500*705*800MM	110KG	220V	1500KW	5.1L*1	16-18
H16C	550*500*1260MM	80KG	220/110V	1300KW	4.5L	12-16
H32C	550*500*1260MM	90KG	220/110V	2800KW	9.5L	28-32
CY-N28	605*765*1370MM	100KG	220V	2300KW	10L*1	28-32
CY-N45	605*765*1370MM	120KG	220V	2800KW	15L*1	38-45
CY-N60	605*765*1370MM	140KG	220V	3550KW	15L*1	50-60
CY-N80	605*1000*1370MM	160KG	220/380V	3750KW	30L*1	80-90
BQ26	500*700*1350MM	135KG	220V	2400KW	9.5L*1	24-26
BQ32	500*770*1350MM	140KG	220V	2800KW	10.6L*1	28-32
BQ40	500*7700*1350MM	150KG	220V	3200KW	10.6L*1	36-42

Slush Machine

- ✓ Quiet and low noise
- ✓ Various specifications
- ✓ Food grade stainless steel



Product Description

The slush machine can be used for multiple purposes. It can not only produce snow products, but also make juice and cold, drinking water. Adopt imported compressor, high cooling efficiency and quick sand discharge.

Technical Parameters



Model	Capacity	Size	Weight
GD-15L	15L	300*520*730mm	48kg
GD-15L*2	15L*2	400*520*730mm	64kg
GD-15L*3	15L*3	580*520*730mm	73kg
GD-12L	12L	230*550*800mm	45kg
GD-12L*2	12L*2	430*550*800mm	55kg
GD-12L*3	12L*3	630*550*800mm	65kg
GD-10L	10L	300*570*730mm	48kg
GD-10L*2	10L*2	400*520*730mm	64kg
GD-10L*3	10L*3	580*520*730mm	73kg

Snowflake ice machine

- ✓ Adjustable thickness
- ✓ Good heat dissipation
- ✓ High quality compressor
- ✓ Water/milk, etc. can be added



Product Description

Snowflake ice machine is a mechanical compression refrigeration method. Equipment that continuously passes water through refrigeration, ice scooping, spiral conveying, extrusion, and molding to make ice close to its natural state; it is high-efficiency, pollution-free, and highly automated. It is the one with the highest conversion rate among all ice-making methods. Ice way.



GD-GSIM60



GD-GSIM120



GD-GSIM160



GD-GSIM200

Technical Parameters

Model	GD-GSIM60	GD-GSIM120	GD-GSIM160	GD-GSIM200
Power	360w	750w	1200w	1100w
Voltage	220v 50hz	220v 50hz	220v 50hz	220v 50hz
Cooling Method	60kg/24h	120kg/24h	180kg/24h	200kg/24h
Control Method	Air-cooled	Air-cooled	Air-cooled	Air-cooled
Cooling Method	Button	Button	Button	Button
Size	290*485*340mm	310*570*420mm	335*570*520mm	375*583*550mm
Weight	18.5kg	23kg	31kg	45kg

Popsicle machine

- ✓ Various mold shapes
- ✓ Support customization
- ✓ Mold is made of SUS 304
- ✓ Good quality and fast forming



Product Description

Popsicle machine is a kind of equipment used for cooling and forming Popsicle machine, suitable for cold drink shops, food processing factories, convenience stores, various entertainment areas and other places. The Popsicle machine has a microcomputer control system, which can control the temperature more accurately. It has the characteristics of high-speed refrigeration, rapid prototyping, easy operation and quiet operation. And the shape and size of the Popsicle mold can be customized, which can meet all the requirements of customers. It is an ideal Popsicle making equipment.



1 mold



2 molds



4 molds



10 molds

Technical Parameters

Model	GD-1	GD-2	GD-6	GD-8	GD-10	GD-12
Dimensions(mm)	600*400*960	760*500*960	1990*915*750+250	2400*920*680+250	3120*960*680+250	3400*720*680+250
Voltage	220V/50HZ	220V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ
Power(w)	900	1200	3000	5000	6000	6000
Weight(kg)	58	72	250	280	320	350
Condenser	air cooled	air cooled	air cooled	air cooled	air cooled	air cooled
Compressor	Japan Meizhi 1P	Japan Meizhi 1.5P	Meizhi/Panasonic3P	Meizhi/Panasonic5P	Meizhi/Panasonic6P	Meizhi/Panasonic6P
Refrigerant	R22/R410	R22/R410	R22	R22	R22	R22
Daily output	3000 pcs	6000 pcs	16000 pcs	23000 pcs	32000 pcs	36000 pcs
GW	81KG	104KG	350KG	380KG	430KG	460KG
Packing size(mm)	685*520*1077	845*621*1105	2220*1005*1260	3000*880*945	3200*1200*970	3450*1170*970
Coolant(kg)	40	45	200	300	400	470

Big ice block make machine

- ✔ Good quality and fast forming
- ✔ Mold is made of SUS 304
- ✔ Simple and easy to operate
- ✔ Support customization



Product Description

Ice block machine is a piece of equipment used to freeze large ice cubes/block/brick. It is suitable for frozen food processing plants, hotels, cafeterias, Ocean Zoo and other places. Ice block making machine has a microcomputer control system, which can control the temperature more accurately. It has the characteristics of high-speed refrigeration, rapid prototyping, easy operation, and silent operation. The shape and size of the mold can be customized to meet all customer requirements, making it an ideal ice-making equipment.

Technical Parameters

Model	GD-IBMM-1T	GD-IBMM-5T
Number of mold	18	80
Voltage	380V/50HZ	380V/50HZ
Condensation method	air cooled	water cooled
Compressor	Matsushita, Japan	Matsushita, Japan
Refrigerant	R22/R410	R22
Power	5.5kw	30kw
Daily output	1T/24h	5T/24h
Machine size	2300*850*1350mm	4450*1430*1400mm
Mold size	220*80*650mm 10kg	220*80*650mm 10kg
Time	4h	4h
Net weight	300kg	1200kg

Chicken Rotisserie Machine

- ✓ Appearance customization
- ✓ Color spraying customization
- ✓ Design team
- ✓ Function customization



Product Description

The roast duck oven is made of high-quality imported stainless steel plate, which has the characteristics of high temperature resistance, anti-corrosion, easy operation, high efficiency and convenience, power saving and energy saving. It is divided into electric heating type and gas heating type, suitable for roasting various meat foods.

Technical Parameters

Electric						
Model	Specification	Size(mm)	Power(kw)	Voltage	Weight(kg)	Temperature(°C)
MEJ-3P	3-rod	1180*490*710	6	220/50Hz	50	50-300
MEJ-6P	6-rod	1180*490*1250	12.3	380/50Hz	75	50-300
MEJ-9P	9-rod	1180*490*1780	18.4	380/50Hz	105	50-300

Gas						
Model	Specification	Size(mm)	Power(kw)	Voltage	Weight(kg)	Temperature(°C)
MGJ-3P	3-rod	1180*490*710	0.2	220-240V/50Hz	50	50-300
MGJ-6P	6-rod	1180*490*1250	0.3	220-240V/50Hz	85	50-300
MGJ-9P	9-rod	1180*490*1780	0.4	220-240V/50Hz	105	50-300

Vertical Rotary Chicken Rotisserie

- ✓ Tempered glass
- ✓ Stainless steel body
- ✓ Indoor lighting, automatic constant temperature
- ✓ A variety of heating methods are optional



Product Description

The roast duck oven is made of high-quality imported stainless steel plate. There are electric heating, gas and other models, suitable for Beijing roast duck, beer roast duck, sesame roast duck, chicken legs, chicken wings and other products, is an ideal meat roasting tool.

Technical Parameters

Model	Specification	Voltage	Weight	Power	Dimension
850-1	Gas and Charcoal	220V/50HZ	115KG	0.58KW	850*1000*1610MM
850-2	Gas and Carbon +Automatic temperature control	220V/50HZ	115KG	0.58KW	850*1000*1610MM
850-3	Charcoal	220V/50HZ	110KG	0.58KW	850*850*1585MM
850-4	Electric and Charcoal	220V/50HZ	115KG	5KW	850*1000*1610MM
850-5	Gas +Automatic temperature control	220V/50HZ	115KG	0.58KW	850*1000*1610MM
850-6	Electric	220V/380V/50HZ	115KG	11KW	850*1050*1610MM
850-7	Gas	220V/50HZ	115KG	0.58KW	850*1000*1610MM
680-1	Gas double row	220V/50HZ	55KG	0.58KW	680*810*1450MM
680-2	Gas and Charcoal	220V/50HZ	55KG	0.58KW	680*810*1450MM
680-3	Single fire row	220V	46KG	0.58KW	680*680*1400MM
680-4	Charcoal	220V	50KG	0.58KW	680*680*1400MM
680-5	Electric and Charcoal	220V/50HZ	115KG	4.2KW	680*810*1450MM
680-6	Electric	220V/50HZ	115KG	9KW	680*830*1450MM
680-7	Gas	220V/380V	49KG	9KW	680*680*1400MM





Candy pouring machine

- ✓ Automatic cleaning
- ✓ Customizable molds
- ✓ Famous brand accessories
- ✓ High accuracy



GD-D



GD-V



Product Description

Candy pouring machines experimental machine is a depositing equipment for laboratory or small batch candy production. Candy pouring machines is controlled by a full servo motor and operated by touch screen menu. The pouring amount and pouring speed are easy to adjust and control, with high degree of automation and high production efficiency. Candy pouring machines can be used for depositing hard candy, soft candy, toffee and other candies.

Technical Parameters

Model	GD-D	GD-V
Deposit Times	30-60times/min	20-35times/min
Productivity	60-100kg/h	40-150kg/h
Voltage	220V/50Hz	220V/50Hz
Power	4.2kw	1.2kw
Nozzle/Piston	10pcs	20pcs
Machine Size	1000*760*870mm	804*660*1300mm
Weight	100kg	320kg

Lollipop Forming Machine

- ✓ Easy to clean
- ✓ Compact structure
- ✓ High molding accuracy
- ✓ Can be produced lollipop 100-300kg/h



Product Description

Lollipop forming machines can be widely used in various lollipop manufacturing scenarios to improve production efficiency and quality stability, reduce labor intensity of workers, and reduce production costs. It can be used alone or in combination. It is an ideal product for investors in the candy industry.

Technical Parameters

Model	Outer Size	Voltage	Power	Candy size	Ball weight	Capacity	Weight
GD-400	100*900*1200mm	220V/380V	1.5Kw	18-35mm	6-18g	100-300kg/h 600-800pcs/min	600kg

Batch Roller and Rope Sizer

- ✓ Easy to operate
- ✓ Low noise
- ✓ High work efficiency
- ✓ Multifunctional machinery



Product Description

This machine is a special equipment for keeping the sugar mass warm and elongated into strips. The sugar mass at the appropriate temperature is placed in the thermal insulation roller bed, so that the sugar mass is pulled into a conical sugar column. Under the action of the pulling roller, the sugar column is further drawn into thin strips for use by the forming machine. (The distance between the pull rollers can be adjusted. The speed can be matched with any molding machine)

Technical Parameters

Name	Power	Weight	Outer size	Capacity
The batch roller	4.75kw	450kg	2100*600*1150mm	150-300 pieces/min
The rope sizer	3.3kw	430kg	1400*800*1300mm	150-300 pieces/min



Ice Cream Cone Maker

- ✓ Flat bottom and pointed bottom
- ✓ Including wafer and crispy
- ✓ Overheat protection



GD-4



GD-10



GD-24



GD-32



GD-40



GD-60

Product Description

Crepe cake machine is used to make skins for mille crepe cake. According to different molds, it can make 6-inch to 10 inch products, which is convenient and fast. It has high output and wide application range which can be used in cake shops, food processing industries, restaurants and other places.

Technical Parameters

Type	Size(mm)	Weight	Packaging size(mm)	Packaging weight	Power	Capacity
GD-4	530x430x700	80kg	570x520x770	95kg	3.6kw	100-200 pieces per hour
GD-10	760x600x1050	200kg	970x680x1200	230kg	5kw	250-300 pieces per hour
GD-24	730x800x1370	350kg	890x820x1500	400kg	12kw	600-800 pieces per hour
GD-32	880x880x1380	450kg	900x1000x1540	510kg	15kw	800-1000 pieces per hour
GD-40	1080x890x1465	660kg	1120x930x1620	720kg	18kw	1200-1400 pieces per hour
GD-60	1120x1180x1550	1046kg	1240x1180x1660	1130kg	21kw	2400-3000 pieces per hour

Ice cream cone production line

- ✓ High automation
- ✓ Long working life
- ✓ Low cost maintenance
- ✓ Support customization

- Waffle cone machine -



- Wafer cone machine -



Product Description

Automatic ice cream cone making machine is a kind of PLC control, high degree of automation, high production efficiency, stable performance of the production machinery. It can make sugar rolled cone, egg roll, round thin biscuit, wafer biscuit and bowl-shaped cup.

Technical Parameters

Name	Power	Voltage(v)	Weight(kg)	Size(mm)	Capacity
Heating mixing drum	4	220/380	200	800*1650	200L
Ice cream cone baking machine	3.37	220/380	4300	7600*2100*2000	3500-4000pcs/h
Conveyor belt machine	0.75	220/380	250	5000*800*500	200/h
Automatic bagging machine	0.75	220/380	200	2400*1100*1200	5000pcs/h



Ice Cream Cone Machine

- ✓ Efficient and consistent
- ✓ One person can operate
- ✓ Mold can be customized
- ✓ Temperature controllable



Product Description

Ice cream cone machine is a special equipment for producing ice cream cone, and can also be further processed into crispy Chicken rolls, Phoenix Chicken rolls, etc. Ice cream cone machine can complete quantitative batter feeding, pancake baking, and automatic rotation of the pan.

Technical Parameters

Model	GD-6	GD-9	GD-12	GD-15	GD-18
Capacity	300pcs/h	400-500pcs/h	700-800pcs/h	800-900pcs/h	1000-1200pcs/h
Molds number	6 sets	9 sets	12 sets	15 sets	18 sets
Power	10.5kw	12.6kw	16.8kw	21kw	25.2kw
Weight	300kg	700kg	750kg	800kg	850kg
Size	D1700*1250mm	D1600*1280mm	D1700*1280mm	D1800*1280mm	D1920*1280mm
Package size	D2000*1350mm	D1700*1400mm	D2000*1350mm	D2030*1350mm	D2100*1350mm
Voltage	220/380v	220/380v	220/380v	220/380v	220/380v

Vertical Hair Roller Cleaning Machine

✓ Fully automatic operation

✓ Easy operation

✓ 3-5 workers can handle whole line



Product Description

The hair roller cleaning machine is suitable for the sorting and cleaning of various root vegetables and citrus fruits such as carrots and potatoes. It adopts food-grade belts and food-grade brushes for conveying and cleaning.

The machine is equipped with high-pressure spray, which has a good cleaning effect and can thoroughly clean the stains on the surface of fruits and vegetables.

Technical Parameters

Vertical model			
Model	Power	Size	Weight (kg)
600	1.1	1000*850*1200	220
800	1.5	1200*850*1200	235
1000	1.5	1400*850*1200	260
1200	1.5	1600*850*1200	270
1500	2.2	1900*850*1200	315
1800	3	2200*850*1200	350
2000	4	2400*850*1200	380

Horizontal Model			
Model	Power	Size	Weight (kg)
600	1.1	1450*850*1000	205
800	1.5	1650*850*1000	225
1000	1.5	1850*850*1000	250
1200	1.5	2050*850*1000	260
1500	2.2	2350*850*1000	300
1800	3	2650*850*1000	320
2000	4	2850*850*1000	350

Spiral shaft brush machine

- ✓ Fully automatic operation
- ✓ Easy operation
- ✓ 3-5 workers can handle whole line



Product Description

The machine consists of a motor, a transmission, a hair roller and a helical blade. The material is pushed forward by the spiral blade in the cleaning tank, peeled when it rubs against the brush, and is cleaned by the high-pressure spray head above and sent out of the machine. The machine can clean various round materials, and the waste water will be filtered and discharged.

Technical Parameters

Size	Material	Quantity of brushes	Brush length	Machine weight
3100*960*1600mm	Stainless steel	7-9 pcs	2300mm	300kg



Dehydrator Machine

- ✔ Simple operation
- ✔ Stainless steel
- ✔ Efficient reducer
- ✔ Set dehydration time



Product Description

Centrifugal dehydrator is mainly used for fruit and vegetable processing industry, fruit and vegetable in food industry, food cleaning, dehydration and drying after blanching. The dehydrator uses centrifugal motion as its working principle, that is, the motor drives the inner tank to rotate at a high speed, and the moisture in the dehumidified material performs centrifugal motion under high-speed rotation. Water splashes out of the inner bladder from the surrounding eyes of the inner bladder to achieve the purpose of dehydration.

Technical Parameters

Model	Size	Voltage	Power
GD-400	900*550*700MM	220V/380V	0.75KW
GD-500	950*650*800MM	220V/380V	1.1KW
GD-600	1000*750*850MM	220V/380V	1.5KW
GD-800	1250*900*1050MM	220V/380V	2.2KW

Automatic Potato Fresh Potato Chips Production Line

- ✓ Fully automatic operation
- ✓ Easy operation
- ✓ 3-5 workers can handle whole line



Product Description

The production line can automatically clean, peel, cut, control dry moisture, fry, control oil, season and other processes to produce standardized potato chips and french fries.

Technical Parameters

Device name	Power(kw)	Voltage(V/Hz)	Dimensions(mm)
Hoist	0.75	380/50	1500x1800x1500
Washing and peeling machine	4.75	380/50	3000x900x1500
Picking line	0.75	380/50	4000X1000X900
In addition to water machine vibration	1.5	380/50	2000x1000x1300
Fries machine potato chips	1.5	380/50	1300X900X1500
Washing machine	5.5	380/50	4000X1200X900
Blanching Line	125	380/50	5000X1200X950
Air-dryer	15	380/50	5000X1200X1400
Electrically heated frying line	203	380/50	5000X1200X2400
Wind-blown leacher	15	380/50	4000X1200X1500
Vibration degreasing machine	1.5	380/50	2000X1000X1300
Roller seasoning machine	0.75	380/50	3500X1200X1000



Automatic Half Fried Frozen French Fries Production Line

✓ Half automatic operation ✓ Support customization ✓ Capacity up to 50-1000kg/h



Product Description

The production line can automatically clean, peel, cut, control dry moisture, fry, control oil, season and other processes to produce standardized potato chips and french fries.

Technical Parameters

Device name	Power(kw)	Dimensions(mm)
Cleaning and peeling machine	1.5	1750x900x900
Potato cutting machine	0.75	850x850x1000
Blanching machine	24	1400X600X1050
Potato dehydrating machine	0.75	850x500x600
Chips frying machine	24	1400X600X1050
Chips de-oiling machine	0.75	850X500X600
Seasoning machine	1.1	1400X900X1700
Packing machine	1.5	800X500x100

Square Fryer Machine

- ✓ Mufti-function
- ✓ Wide application
- ✓ Automatic temperature control
- ✓ Oil-water separation



Product Description

The Semi-automatic frying machine is also called oil-water energy-saving frying machine. It has electric heating, coal heating, gas heating and other methods.

Technical Parameters

Model	Power	Capacity	Frying basket size	Machine size
GD-F100	12KW	380V 50hz	500*500	750 * 800 * 1000
GD-F200	24KW	380V 50hz	1000*500	1250 * 800 * 1000
GD-F300	36KW	380V 50hz	1500*500	1750 * 800 * 1000
GD-F400	48KW	380V 50hz	2000*500	2250 * 800 * 1000



Round Frame Fryer Machine

- ✔ Multi-function
- ✔ Wide application
- ✔ Automatic temperature control
- ✔ Oil-water separation



Product Description

The Semi-automatic frying machine is also called oil-water energy-saving frying machine. It has electric heating, coal heating, gas heating and other methods.

Technical Parameters

Model	Power	Voltage	Frying Basket Diameter	Size
GD-400	36kw	380V 50hz	800mm	1050*1000*1700mm
GD-500	48kw	380V 50hz	1000mm	1050*1000*1700mm
GD-600	60kw	380V 50hz	1200mm	1450*1400*1700mm
GD-800	78kw	380V 50hz	1500mm	1750*1700*1700mm

Desktop Electric Fryer

- ✓ Timing design
- ✓ Over temperature protection
- ✓ Oversized frying basket
- ✓ Intelligent temperature control



Product Description

Fryers refer to kitchen equipment that uses edible oil as the main raw material to fry food. It has the characteristics of novel style, reasonable structure, simple operation, fast heating speed and easy cleaning.

Technical Parameters

Model	Power	Capacity	Size	Net Weight	Temperature range
Single cylinder	2.5kw/220v	6L	416x315x340mm	5kgs	60-200°C
Double cylinder	2.5+2.5kw/220v	6L+6L	60x455x320mm	9kgs	60-200°C



Desktop Gas Fryer

- ✓ Thicken plate
- ✓ 3 row burners
- ✓ 200000 ignition tests
- ✓ Temperature control



Product Description

Fryers refer to kitchen equipment that uses edible oil as the main raw material to fry food by gas. It has the characteristics of novel style, reasonable structure, simple operation, fast heating speed and easy cleaning.

Technical Parameters

Model	Heat Power	Capacity	Size	Net Weight	Temperature range
Single cylinder	10.8 Megajoule	8L	310x660x550mm	22kg	0-200℃
Double cylinder	40.4 Megajoule	8L+8L	600x630x480mm	29kg	0-200℃

Vertical Electric Fryer

- ✓ Automatic constant temperature
- ✓ Automatic power off
- ✓ Easy to clean
- ✓ Original heating tube



Product Description

Fryer machine refer to kitchen equipment that uses edible oil as the main raw material to fry food. It has the characteristics of novel style, reasonable structure, simple operation, fast heating speed and easy cleaning.

Technical Parameters



GD-A1



GD-A2



GD-A3



GD-B1



GD-B2



GD-B3

Model	Size	Voltage	Power	Specifications
GD-A1	430*785*1120mm	220V	9/12/18KW	Single tank 2-basket
GD-A2	430*785*1120mm	220V	9/12/18KW	Double tank 2-basket
GD-A3	810*845*1155mm	380V	18+18KW	Double tank 4-bansket
GD-B1	430*785*1120mm	220V	9/12/18 KW	Single tank 2-basket (with oil filter)
GD-B2	430*785*1120mm	220V	9/12/18KW	Double tank 2-basket (with oil filter)
GD-B3	810*845*1155mm	380V	18+18KW	Double tank 4-bansket (with oil filter)



Vertical Gas Fryer

- ✓ Automatic constant temperature
- ✓ Automatic power off
- ✓ Easy to clean
- ✓ Original heating tube



Product Description

Fryer machine refer to kitchen equipment that uses edible oil as the main raw material to fry food. It has the characteristics of novel style, reasonable structure, simple operation, fast heating speed and easy cleaning.

Technical Parameters



JBT-20



JBT-40



JBT-60



JBT-15/2



JBT-17/2

Model	Size	Capacity	Gas type	Specifications
JBT-20	500*800*520mm	40L	Liquefied gas natural gas	Single tank 2-basket
JBT-40	430*785*1120mm	80L	Liquefied gas natural gas	Single tank 2-basket
JBT-60	430*785*1120mm	120L	Liquefied gas natural gas	Single tank 2-basket
JBT-15/2	810*845*1155mm	25L+25L	Liquefied gas natural gas	Double tank 2-bansket
JBT-17/2	430*785*1120mm	60L+60L	Liquefied gas natural gas	Double tank 2-bansket

Octagonal Mixer

- ✓ Automatic stirring
- ✓ Easy to operate
- ✓ Not easy to break
- ✓ 304 stainless steel material



Product Description

Octagonal Mixer is mainly suitable for food processing plants. The machine is designed and manufactured according to the shape characteristics of fried food, and when mixing fried food, the fried food is not broken, automatically mixed, easy to operate, and high output. Any food can be seasoned, mixed, stirred and mixed well.

Technical Parameters

Model	Size	Weight	Voltage	Power	Volume
GD-800	1200*800*1600mm	120KG	380V	0.75kw	0.18CBM
GD-1000	1400*1300*1800mm	150KG	380V	1.1kw	0.3CBM
GD-1200	1900*1400*2200mm	240KG	380V	2.2kw	0.52CBM



Crepe Cake Machine

- ✓ Adjustable speed
- ✓ Copper core motor
- ✓ Multi purpose
- ✓ Overheat protection



Product Description

Crepe cake machine is used to make skins for mille crepe cake. According to different molds, it can make 6-inch to 10 inch products, which is convenient and fast. It has high output and wide application range which can be used in cake shops, food processing industries, restaurants and other places.

Technical Parameters

Model	Voltage	Power	Output	Temperature range	Time range	Weight	Dimension
GD-65	220V	2.2kw	100-300pcs /h	125-190℃	4-15 S	30kg	500*350*350mm



Taiyaki Cake Machine

- ✓ Speed controllable
- ✓ Adjustable injection volume
- ✓ The mold can be customized



Product Description

Taiyaki cake machine is fully automatic. Taiyaki cake machine has high integration, and a single machine can achieve the entire process of filling, forming, and baking sandwich cakes. Compact structure, simple operation, compact and flexible, with high degree of automation. Taiyaki cake machine finished product can be sold directly on site or packaged for sale.

Technical Parameters

Model	Outer size	Voltage	Power	Production speed	Gross weight	Machine material
GD-E800	1100*800*1150mm	220V	4.2kw Electric heating	700-800pcs/min	190kg	304 stainless steel
GD-G800	1100*800*1150mm	220V	150w Gas heating	700-800pcs/min	190kg	304 stainless steel
Special mold can be made according to customer request						
1 set of mold system including 22 pcs small molds						

Automatic Donut Machine

- ✓ Temperature control
- ✓ Speed control
- ✓ Automatic forming
- ✓ Automatic propulsion



3-5CM

6-7CM

8-9CM

Product Description

The automatic donut machine is easy to operate and has high work efficiency, which is the best choice for various franchise stores and food factories. It has the advantages of automatic temperature control, ultra-high temperature protection system, chain crawler conveyor, donut thickness adjustment, safety oil discharge valve, etc.

Technical Parameters

Model	Net weight	Power	Voltage	Heating method	Size	Die size
SK-T1	43kg	6kw	220V/50-60HZ	Electric heating	1050*540*670mm	20mm/36mm/40mm

Popcorn Machine

- ✔ Easy to operate
- ✔ Selected stainless steel
- ✔ Fully automatic operation



Product Description

The pot body of this equipment is a hemispherical stainless steel pot body formed by one-time stamping. It adopts electric heating heat transfer oil heating method, which has the characteristics of high efficiency and uniform heating. Using frequency conversion speed regulation, the speed can be adjusted arbitrarily, and the operation is more stable. Automatic temperature control and temperature display, no dead ends when pouring materials, easy to clean, saving manpower.

Technical Parameters

Pot volume	Diameter	Motor power + Hydraulic station	Rotate speed	Stirring form	Boom/pan form	Size	Voltage
100L	800mm	1.5+1.5	Adjustable	Planet / Scrape the bottom	Automatic / Hydraulic pressure	1650*1250*1550	220V-380V
200L	900mm					1800*1650*1550	
300L	1000mm					1840*1850*1670	



Food Puffing Machine

- ✓ Easy to use
- ✓ Various molds
- ✓ Stainless steel
- ✓ Security and stability



Product Description

The food puffing machine adopts advanced twin-screw screw extrusion technology to homogeneously mix the raw materials of various grains by the mixer, and then subject to high temperature and high pressure in the extruder. Puffed food can be produced in various shapes by changing the molds. The food extruder has the characteristics of wide range of raw materials, convenient operation and maintenance, low energy consumption and high output. The puffed small food has a crisp taste, easy to digest, unique fragrance, easy to carry, and is an ideal snack food for consumers.

Technical Parameters

Model	Main motor power	Screw diameter	Output	Size	Weight
GD-65	22kw	Φ65	100-150 kg/h	2500*1000*1800mm	1.2 t
GD-70	30kw	Φ70	200-360 kg/h	4100*1000*1800mm	1.8 t
GD-85	55kw	Φ85	300-550 kg/h	4100*1000*1800mm	2.5t
GD-95	110kw	Φ95	800-1200 kg/h	5800*1700*2000mm	6t



Drum Flavoring Machine

- ✓ Low noise
- ✓ Mixing evenly
- ✓ Safe&Durable



Product Description

This Drum Flavoring Machine consist of flavoring drum, liquid spaying tank, spraying gun etc.It is used for seasoning food in the food production process and can mix liquid, such as oil, honey, syrup, with snack food, beans, peanuts, chips, teas and other food.The flavoring drum is made with best shape with paddles.The liquid tank is equipped with heating pipe to heat the flavor to make them mix better.The machine is made of food grade stainless steel, complying with hygiene requirement. The control panel is easy to operate.

Technical Parameters

Drum Type	Power	Machine's size	Weight	Drum length
GG1500	0.75 Kw	1800*700*1600 mm	180 Kg	1500 mm
GG2000	1.1kw	2300*800*1700 mm	220 Kg	2000 mm
GG2400	1.1 Kw	2700*900*1700 mm	260 Kg	2400 mm
Remark	With automatic sprinkling, mainly used in continuous production line			

Octagonal Type	Power	Machine's size	Weight	Drum length
LG800	1.1Kw	1000*800*1300 mm	130 Kg	800 mm
LG1000	1.5kw	1100*1000*1300 mm	150 Kg	1000 mm

Breading bread crumbs coating machine

- ✓ High efficiency
- ✓ Guaranteed quality
- ✓ Stable operation
- ✓ The amount of crumbs can be adjusted



Product Description

The bread crumb coating machine uses the bread crumbs leaked from the hopper and the bread crumbs on the mesh belt to evenly coat the bread crumbs on chicken, beef, pork, fish and shrimp and other products. Mainly suitable for fast food restaurants, supermarkets, food factories

Technical Parameters

Model	GD-200	GD-400	GD-600
Belt width	200mm	400mm	600mm
Power	0.86kw	3.7kw	3.7kw
Size	1720*650*1400mm	2638*1050*2280mm	2638*1050*2280mm
Weight	230kg	450kg	620kg



Multi-functional encrusting machine

- ✓ Adjustable size
- ✓ Automatic stuffing
- ✓ High production speed
- ✓ High-quality construction



GD-ENCM-6881



GD-ENCM-6882



GD-ENCM-868

Product Description

Multi-functional encrusting machine with industrial configuration as PLC controller. With human-computer interface, it is easy to operate and remember performances of hundreds of products . And the machinery is durable and easy to operate . Since major electrical controlling components are among first-class world famous brands , it can be assured that it is capable of working for a long time.

Technical Parameters

Model	Voltage	Power	Production speed	Size	Weight
GD-ENCM-6881	220V	1.3Kw	20-120pcs/min	1.8*1.0*1.3m	330kg
GD-ENCM-6882	220V	1.3Kw	20-120pcs/min	1.8*1.0*1.3m	380kg
GD-ENCM-868	220V	1.9Kw	20-120pcs/min	1.79*0.82*1.6m	390kg

Dining car



**Appearance
Customization**



**Color Spraying
Customization**



**Size
Customization**



**Function
Customization**





Food Truck



Product Description

Food truck can sell: donuts, waffles, hot dogs, coffee, drinks, fast food, burgers, pasta, seafood, sushi, barbecue, etc. It can also be used as mobile shops, mobile beer bars, mobile clothing carts, mobile band venues, etc. It can be use in wedding, carnival etc. We are happy to help you start a food truck business.

Food Trailer



Product Description

Mobile food truck operation: It can be sold in the lively markets, supermarkets, night markets, school gates, high-traffic attractions, stations, cinema gates, etc.



Food Cart



Product Description

The mobile food truck, financially lowest cost, fully customized, fast recover your cost. Mobile kitchen with reasonable layout and matching devices, allowing you to make quick work of your signature foods and keep up with your busiest hours.

Choose food equipment according to your requirement, and tell us.



Wafer machine



Muffin machine



Electric flat griddle



Hamburg Machine



Popcorn machine



Oven



Panini grill



Hotdog Machine



Smoothie Blender



Electric Juice



Coffee machine



Water boiler



Wastebaskets



Operated sink



Stove



Fryer

Fruit & Vegetable Processing Machines





Onion skin peeling machine

- ✓ High yield
- ✓ Onions can be peeled without grading
- ✓ Low energy consumption and large output
- ✓ Without wearing parts and with long service life



Product Description

The onion peeling machine is a large-capacity onion processing equipment. It has no special requirements on the size, dryness, and origin of the onion. It can peel the onions in any state at one time and peel them off. This machine has been widely used in vegetable processing, processing industry.



GD-OOPM1



GD-OOPM2



GD-OOPM3



GD-OFTM1



GD-OFTM2

Technical Parameters

Model	Voltage	Size(mm)	Weight	Capacity
GD-OOPM1	380V 1.52KW	2050x1060x1960	286KG	45 PCS/MIN
GD-OOPM2	380V 1.15KW	2220x1200x1950	300KG	1-1.5T/H
GD-OOPM3	380V 1.52KW	2150x1150x2000	300KG	2-2.5T/H
GD-OFTM1	380V 1.11KW	3000x830x1500	203KG	50-60 PCS/MIN
GD-OFTM2	380V 2.22KW	2600x1400x1400	350KG	100 PCS/MIN

Black garlic fermentation processing machine

- ✔ Low noise
- ✔ Simple operation
- ✔ Short fermentation period
- ✔ Automatic temperature control



Product Description

Black garlic fermentation processing machine is used to ferment garlic to improve its nutritive and economic value. The garlic will be fermented through our machine, the taste will become nice, and with the different nutrition, Now become a popular snack, with a lot of amino acid, it is good for human health. Black garlic fermentation processing machine offers anti corrosion environment and can shrink under high temperature and humidity conditions, specifically used in the food processing industry to meet food grade requirements.

Technical Parameters

Model	Box-dimension(mm)	Dimension(mm)	Fresh garlic(kg)	Black garlic (kg)
GD-80	400*400*500	1000*870*1700	15	7.5
GD-100	500*400*500	1050*870*1700	18	9
GD-120	500*400*600	1050*870*1750	20	10
GD-150	500*500*600	1050*970*1750	23	11.5
GD-255	600*500*750	1150*970*1900	38	19
GD-408	800*600*850	1350*1150*1950	80	40
GD-800	1000*800*1000	1450*1300*2100	155	77.5
GD-1000	1000*1000*1000	1470*1400*2100	190	95
GD-2000	2000*1000*1000	2600*1400*2100	380	190

Fruit sorting machine

- ✔ Simple operation
- ✔ Can be customized
- ✔ No harm to the fruit
- ✔ Low power consumption



Product Description

Fruit sorting machine adopts roller conveyor and sorts fruits and vegetables according to their diameter. The drum is composed of round holes with gradually increasing diameter, which is not easy to damage the fruit. The sorting speed is fast and the efficiency is high

Technical Parameters

Model	Number of rollers	Voltage	Capacity	Sorting size
GD-GFSM3	2	220/50hz	1t/h	customizable
GD-GFSM4	3	220/50hz	1t/h	
GD-GFSM5	4	380/50hz	2t/h	
GD-GFSM6	5	380/50hz	2t/h	

Potato Peeling Slicing Machine

- ✔ Automatic washing, peeling and cutting
- ✔ SUS 304 stainless steel
- ✔ Sblades Stable operation



Product Description

The potato peeling machine has the characteristics of high inorganic removal rate, low breakage rate, clean, hygienic, high consumption efficiency, simple operation, and easy maintenance. It can automatically do the whole process of washing, peeling and cutting.

Technical Parameters

Model	GD-200	GD-300	GD-500A	GD-500B
Capacity	200kg/h	300kg/h	500kg/h	500kg/h
Size	1100*500*850mm	1030*550*1150mm	1350*700*1250mm	1200*600*1050mm
Weight	100kg	95kg	150kg	120kg



YQC 180 Vegetable Cutting Machine

- ✓ High Automation
- ✓ High performance cost ratio
- ✓ Equal to 12 manpower



Product Description

YQC 180 Vegetable Cutting Machine can cut out various specifications of pieces, wire and diced by changing the cutter head. Large function, multi-use machine, save time and energy.

Technical Parameters

Model	YQC180(roots& stems)
Roots and stems output	300-1000kg/h
Voltage (adjustable)	220V 50Hz
Power	1.5KW
Dimension	600*500*900mm
Weight	70kg
Slice size	2-100mm(Customized)
Dice size	6,8,10,12,15,20,25,30mmm
Shred size	2-10mm(Customized)

YQC850 Vegetable Cutting Machine

- ✓ SUS304 stainless steel
- ✓ Double frequency regulator
- ✓ High performance cose ratio



Product Description

By changing different cutters, you can cut root vegetables into slices, shreds, cubes, rhombus, can also cut slender vegetables (celery, beans, etc.) into segments, and cut leafy vegetables into shreds.

Technical Parameters

Model	YQC850(roots& stems & leafy vegetables)
Roots and stems output	800-1300kg/h
Leafy vegetables output	600-1000kg/h
Voltage (adjustable)	220V 50Hz
Power	1.1kw+1.1kw+0.55kw
Dimension	1160*530*1300mm
Weight	140kg
Slice size	2-100mm(Customized)
Dice size	6,8,10,12,15,20,25,30mmm
Shred size	2-10mm(Customized)
Leafy vegetable sherds size	1-60mm(adjustable)



YQC-660/1000 Vegetable Cutting Machine

- ✓ Stainless steel body
- ✓ Easy adjustment and maintenance
- ✓ High yield and high efficiency



Product Description

This machine is widely used in soft and hard roots, stems, leafy vegetables and seaweed processing, cutting the food materials into slices, blocks, silks, cubes, diamond, and curvilinear sharps, etc. The slice thickness is about 2-10 mm adjustable, and the width of cutting shreds and cutting section is about 2 to 23 mm adjustable.

Technical Parameters

Model	YQC-660	YQC-1000
Power	750KW	1500KW
Voltage	220V	220V
Frequency	50HZ	50HZ
Efficiency	200-660KG/H	500-1000KG/H
Weight	100KG	150KG
Size	880x430x750mm	1300x600x1100mm

CHD100 Vegetable Cutting Machine

- ✓ Large feed port
- ✓ Easy to clean
- ✓ Stainless steel body



Product Description

Application for various corm root vegetables:
Vegetables: potatoes, carrots, onions, sweet potatoes, tomatoes, peppers, etc.,
Fruits: melon, cantaloupe, pineapple, mango, etc.
Cutting shapes: cubes, slices, also can shreds, sticks by changing different blade combination.
Cubes size: 3mm, 4mm. 5mm, 6mm. 8mm. 10mm. 12mm,15 mm, 20mm or customized size as per customer's demand.

Technical Parameters

Model	CHD100
Capacity	600-1000kg/h
Cube Size	3.4.5.6.8.10.12.15mm(choose)
Power	0.75KW
Dimension	710*660*1085mm
Weight	100kg



YST-100 Vegetable Cutting Machine

- ✓ Stainless steel shell
- ✓ Simple to operate
- ✓ Time-saving and labor-saving



Product Description

The high-speed French fry cutter can cut potatoes, sweet potatoes, radishes, taro, papaya, etc. into rectangular strips. After cutting, the finished product is uniform. The cut size of the finished product can be customized. The machine is simple to operate, easy to clean after use, saves time and effort, and greatly reduces labor costs.

Technical Parameters

Model	YST-100	Voltage	220V 50HZ
Dimension	1070*685*1030MM	Power	1.1KW
Capacity	500-100kg/h	Cutting size	5/8/10MM (not adjustable)
Weight	120KG	Dialing speed	178r/min

CHD20/80 Vegetable Cutting Machine

- ✓ Large feed port
- ✓ Easy to clean
- ✓ Stainless steel body



Product Description

The vegetable cutting machine is widely used for cutting many kinds of root, stem, leaf vegetables and fruits into different shapes and sizes.

Technical Parameters

Model	CHD20A	CHD20B	CHD80
Capacity	120-350kg/h	400kg/h	500-2000kg/h
Machine Size	715*455*580mm	580*580*1000mm	1200*600*1000mm
Weight	55kg	80kg	155kg
Voltage	220V/50HZ 110V/60HZ	220V/50HZ 110V/60HZ	220V/50HZ 110V/60HZ
Power	0.75KW	0.75KW	1.65KW



Sugarcane Juicer Machine

- ✔ Motor starts fast
- ✔ Easy to operate
- ✔ Big mouth feeding design



Product Description

Sugarcane juicer generally has the advantages of beautiful appearance, convenient operation, small investment and high juice production. It is suitable for use in food and beverage factories, large cold drink shops, family workshops, small farms, brown sugar factories, schools, etc.

Technical Parameters

Electrically-powered engine			
Model	Capacity	Size	Weight(kg)
E-0250	500kg/h	1120*11130*750mm	400kg
E-0350	1000kg/h	1230*1260*860mm	600kg
E-500A	2000kg/h	1420*1440*950mm	760kg

Diesel power engine			
Model	Capacity	Size	Weight(kg)
D-0250	500kg/h	1120*11130*750mm	400kg
D-0350	1000kg/h	1230*1260*860mm	600kg
D-500A	2000kg/h	1420*1440*950mm	760kg

Screw Juicer

- ✓ Screw propelling and extruding
- ✓ Large squzzing force
- ✓ Separation of juice and residue



Product Description

The juicer extractor machine is mainly used to extract fruit and vegetable juices. Suitable for strawberry, pear, apple, lemon, orange juice, tomatoes and other fruits and vegetables.

Technical Parameters

Model	Capacity (kg/h)	Power(kw)	Dimension (mm)	Weight(kg)
LZ-0.5	300-500	1.5	780*320*860	75
LZ-1.0	800-1000	2.2	880*330*900	114
LZ-1.5	1200-1500	4	1300*520*1300	211
LZ-2.5	2000-2500	11	1500*670*1720	440
LZ-5.0	4000-5000	30	2600*950*1900	1300



Spiral Crusher Juicer

- ✔ Automatic separation of juice and residue
- ✔ Large squeezing force
- ✔ Support customized



Product Description

This machine is used for juicing of all fruits and vegetables, suitable for crushing and juicing of ginger, pear and other materials. This equipment consists of two parts: crusher and juicer. The main component is the crushing device installed on the feeding hopper.

Technical Parameters

Model	Capacity (kg/h)	Power(kw)	Dimension (mm)	Weight(kg)
PLZ-0.5	300-500	0.75+1.5	1060*420*1430	115
PLZ-1.0	800-1000	1.5+2.2	1220*450*1450	155
PLZ-1.5	1200-1500	1.5+4	1400*510*1550	170
PLZ-2.5	2000-2500	4+11	1750*750*2000	603
PLZ-5.0	4000-5000	5.5+30	3330*950*2370	1500

Tray Dryer

- ✔ Hot air circulation system
- ✔ Quickly dehydrating food
- ✔ Retain food nutrition




Product Description

This product is mainly used for drying all kinds of vegetables, fruits, seafood, grains, herbs, meat, nuts and other products. It is suitable for factories, dry goods stores, pharmacies and markets. It can meet our tastes and improve the quality of life by drying different foods.



Small Tray Dryer

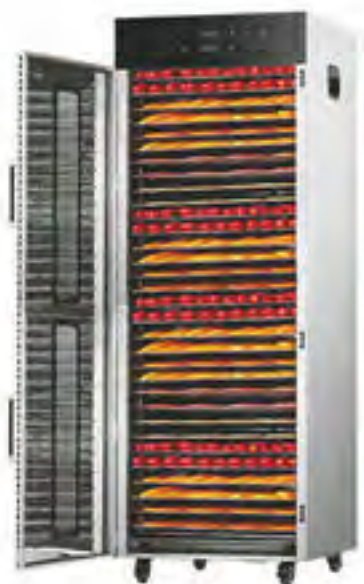

Medium Tray Dryer



Rotary Tray Dryer



Large Tray Dryer



SS-06H/
08H/10H



SS-12H /16H /
20H /24H



GD-10/15/20



SS-32H /
40H /48H



SS-80H/96H

Technical Parameters

Model	Voltage	layers	Power	Drying Try Size
SS-06A	220-240V/50Hz 110V/60Hz	6	600W-700W	28*30CM
SS-06C	220-240V/50Hz 110V/60Hz	6	700W	28*30CM
SS-06H	220-240V/50Hz 110V/60Hz	6	400W	28*30CM
SS-08H	220-240V/50Hz 110V/60Hz	8	800W	28*30CM
SS-10H	220-240V/50Hz 110V/60Hz	10	800W	28*30CM
SS-10HB	220-240V/50Hz 110V/60Hz	10	1000W	38*40CM
SS-12H	220-240V/50Hz 110V/60Hz	12	1000W	38*40CM
SS-16H	220-240V/50Hz 110V/60Hz	16	1500W	38*40CM
SS-20H/24H	220-240V/50Hz 110V/60Hz	20/24	2000W	38*40CM
SS-32H	220-240V/50Hz 110V/60Hz	32	3000W	38*40CM
SS-40H/48H	220-240V/50Hz 110V/60Hz	40/48	4000W	38*40CM
SS-80H/96H	220-240V/50Hz 110V/60Hz	80/96	6400W	38*40CM
Rotary Tray Dryer				
GD-10	220-240V/50Hz 110V/60Hz	10	1500W	300MM
GD-15	220-240V/50Hz 110V/60Hz	15	3000W	550MM
GD-20	220-240V/50Hz 110V/60Hz	20	2000W	375MM

Fruit and Vegetable Bubble Cleaning Machine

- ✔ Deep cleans
- ✔ Simple operation
- ✔ High production efficiency
- ✔ Stable machine performance



Product Description

Bubble cleaning machine is one of the important equipment in the production line of fruits, vegetables and aquatic products, mainly used for the cleaning of fruits, vegetables and aquatic products. The whole set of equipment can effectively remove sediment, weeds and pesticide residues in fruits and vegetables.

Technical Parameters

Model	Length	Mesh belt width	Voltage	Power	Material
GD-3	3m	800mm	380V(Customizable)	Convey 0.75KW + water pump 0.75KW + air pump 1.5KW	304 stainless steel
GD-4	4m	800mm	380V(Customizable)	Convey 0.75KW + water pump 1.5KW + air pump 2.2KW	304 stainless steel
GD-5	5m	800mm	380V(Customizable)	Convey 0.75KW + water pump 1.5KW + air pump 2.2KW	304 stainless steel



Garlic Grinding Machine

- ✓ Simple operation
- ✓ Crush various of materials
- ✓ High production efficiency
- ✓ Good grinding effect



Product Description

The garlic crusher has a simple structure and easy operation, which can easily meet the needs of customers for crushing and grinding fruits and vegetables.

Technical Parameters

Model	Yield	Voltage	Power	Weight	Size
GD-40	200-300kg/h	380v50HZ	2.2kw	120kg	750*500*1200mm
GD-50	300-400kg/h	380v50HZ	4kw	150kg	850*500*1300mm
GD-60	400-500kg/h	380v50HZ	7.5kw	200kg	950*600*1350mm
GY-306	200kg/h	220V50HZ	0.75kw	35kg	650*350*700mm
GY-307	600-800k/h	380v50HZ	2.2kw	95kg	950*380*1000mm
GY-306	800-1000k/h	380v50HZ	1.5kw	85kg	880*400*1100mm

Garlic Peeling Machine

- ✔ Deep cleans
- ✔ Simple operation
- ✔ High production efficiency
- ✔ Stable machine performance



Product Description

This machine is mainly used for peeling garlic. This machine is mainly used in food processing plants for food processing. The garlic peeling machine has a simple structure and can easily meet the customer's demand for garlic peeling.

Technical Parameters

Model	Size	Weight	Voltage	Power	Yield
GD-30	500*460*780mm	40kg	220V	0.2kw	30kg/h
GD-150	620*600*1300mm	80kg	220V	0.2kw	150kg/h
GD-300	700*720*1380mm	95kg	220V	0.2kw	300kg/h
GD-300	1000*720*1480mm	140kg	220V	0.2kw	500kg/h



Coconut Peel Machine

- ✓ Easy to use
- ✓ Easy to clean
- ✓ Good peeling effect
- ✓ Knife durability



Product Description

Automatic coconut peeling machine is a precision automatic peeling machine, which has the characteristics of wide processing range, high efficiency, low noise, easy operation, beautiful appearance, and light size. It is the first choice equipment in the food processing industry.

Technical Parameters

Model	GD-25
Power	0.8kw
Weight	50kg
Capacity	6-10 seconds/piece
Voltage	220V
Dimension	300*420*885mm
Application	100-240mm in diameter
Product size	100-160mm in diameter (Adjustable)
Air consumption	50L/min

Pineapple Peeling Machine

- Adjustable peeling thickness
- Simple operation
- Suitable for various fruits
- Easy to clean



GD-100A



GD-100B



GD-100C



GD-200A

Product Description

Pineapple peeling machine has the characteristics of fast peeling speed, wide application range, simple operation, high efficiency, convenient cleaning, safety and hygiene, and is an ideal equipment for peeling various fruits and melons.

Technical Parameters

Model	Capacity	Size	Voltage	Power	Weight
GD-100A	180 pcs/h	600*700*1700mm	380V	0.75kw	110kg
GD-100B	150-200 pcs/h	420*590*1030mm	220V	0.5kw	55kg
GD-100C	150-200 pcs/h	420*590*1030mm	220V	0.5kw	55kg
GD-200A	150-240 pcs/h	1200*720*1800mm	380V	1.5kw	190kg



Coconut Grinding Machine

- ✔ 304 stainless steel safety and hygiene
- ✔ Simple operation and cleaning
- ✔ Uniform and adjustable fineness



Product Description

The body of a fully automatic coconut meat grinder is usually made of stainless steel, with a sturdy structure that is easy to clean and ensures the safety of operators. Fully automatic coconut meat grinder adopts a high-speed rotating blade, which can quickly grind coconut meat.

Coconut meat grinder machine has high grinding efficiency and can quickly grind a large amount of coconut meat into a delicate state, improving processing efficiency. Coconut meat grinder is designed for crushing and crushing coconut meat, melons, ginger, and rhizome fruits and vegetables, with adjustable discharge fineness.

Technical Parameters

Model	GD-6	GD-8
Voltage	380V/220V 50Hz	380V/220V 50Hz
Power	3kw	7.5kw
Yield	500kg/h	1000kg/h
Net weight	135kg	180kg
Gross weight	160kg	210kg
Dimension	750*630*1000mm	900*800*1100mm
Package size	800*680*1500mm	950*850*1600mm



Apple Peeling and Coring Machine

- ✔ Simple operation
- ✔ Easy cleaning
- ✔ Stable performance
- ✔ Suitable for a variety of fruits



Product Description

Apple peeling and core removal machine is used for peeling, core removal and splitting of apples. It can quickly get clean pulp and is suitable for processing canned, preserved fruit and other foods. The apple peeler and corer has the characteristics of simple operation, adjustable peeling thickness, convenient cleaning, stable performance, safety and reliability, and good peeling effect. The apple peeling and core removal machine is composed of a switch, an entrance for splitting the core, an apple peeling station, and a peeling place. The flap cutting tool can be easily and quickly replaced.

Technical Parameters

Model	Output capacity	Size	Voltage	Power	Weight
GD-01	600pc/h(70-100kg/h)	660*300*400mm	1-230V	150w	40kg

Grain Product Making Machines



Automatic Noodle Machine

- ✓ Automatic one-time molding
- ✓ Intelligent adjustment of skin thickness
- ✓ Efficient production
- ✓ Multiple face knife models



Product Description

This machine can be used for making corn noodles, sorghum noodles, buckwheat noodles, millet noodles, bean noodles and other grains noodles, rice noodles, wheat noodles, beef tendon noodles etc.

Technical Parameters

Model	Capacity	Parameter	Power	Weight	Machine Size
5 group 250Dry	170kg	Main roller diameter 138 other roller diameter 120	3 kw	550	1700*610*1370
5 group 300Dry	260kg	Main roller diameter 138 other roller diameter 120	3 kw	650	1700*750*1370
5 group 350Dry	280kg	Main roller diameter 138 other roller diameter 120	3 kw	800	1700*780*1370
5 group 250Fresh	170kg	Main roller diameter 138 other roller diameter 120	3 kw	600	1700*610*1370
5 group 300Fresh	260kg	Main roller diameter 138 other roller diameter 120	3 kw	700	1700*750*1370
5 group 350Fresh	280kg	Main roller diameter 138 other roller diameter 120	3 kw	950	1700*780*1370
6 group 260Dry	170kg	Main roller diameter 138 other roller diameter 120	3 kw	860	2000*650*1370
6 group 300Dry	260kg	Main roller diameter 138 other roller diameter 120	3 kw	910	2000*680*1370
6 group 350Dry	280kg	Main roller diameter 138 other roller diameter 120	3 kw	990	2000*730*1370
6 group 260Fresh	170kg	Main roller diameter 138 other roller diameter 120	3 kw	910	2000*650*1370
6 group 300Fresh	260kg	Main roller diameter 138 other roller diameter 120	3 kw	950	2000*680*1370
6 group 350Fresh	280kg	Main roller diameter 138 other roller diameter 120	3 kw	990	2000*790*1370
7 group 260Dry	170kg	Main roller diameter 138 other roller diameter 120	3 kw	980	2600*680*1370
7 group 300Dry	260kg	Main roller diameter 138 other roller diameter 120	3 kw	1060	2600*700*1370
7 group 350Dry	280kg	Main roller diameter 138 other roller diameter 120	3 kw	1200	2600*750*1370
7 group 260Fresh	170kg	Main roller diameter 138 other roller diameter 120	3 kw	980	2600*680*1370
7 group 300Fresh	260kg	Main roller diameter 138 other roller diameter 120	3 kw	1000	2600*700*1370
7 group 350Fresh	280kg	Main roller diameter 138 other roller diameter 120	3 kw	1100	2600*780*1370



Noodle Making Machine

- ✓ Adjustable with scale
- ✓ Accurate and convenient
- ✓ Easy to operate,
- ✓ Safe and hygienic



Product Description

The noodle making machine is a device that squeezes the flour through the noodle rolls to form the necessary tenacity and humidity to form noodles. Our noodle making machine is easy to operate, safe and hygienic, The transmission is stable, the transmission power is accurate and efficient.

Technical Parameters

Model	Capacity	Voltage	Roller Size	Patch Width	Rolling thickness	Machine Size	Weight
GD-40	30-40kg/h	1.5KW/220V/380V	88*220mm	1.25-24mm	0.5-12mm	54*43*105cm	75kg
GD-60	40-60kg/h	1.5KW/220V/380V	91*210mm	1.25-24mm	0.8-15mm	65*54*108cm	105kg
GD-80	60-80kg/h	2.5KW/220V/380V	103*250mm	1.25-24mm	0.8-15mm	65*54*118cm	130kg
GD-125	70-120kg/h	2.2KW/220V/380V	120*250mm	1.25-26mm	0.8-20mm	70*60*120cm	160kg

Pasta Making Machine

- ✓ Simple operation
- ✓ Stainless steel cutter head
- ✓ Diversified molds
- ✓ Various finished products



Product Description

The small pasta machine has a simple structure. By changing the mold, it can produce a variety of pasta products to meet the diverse needs of customers.

Technical Parameters

Model	Voltage	Power	Packing size	Weight	Spindle speed	Yield
GD60	220v	2.2-2.5kw	80*50*65mm	90kg	100r/min	15-30 kg/h
GD80	380v	3kw	90*56*78mm	120kg	100r/min	30-60kg/h
GD100	380v	4kw	90*56*78mm	150kg	100r/min	60-90kg/h
GD130	380v	11kw	110*75*120mm	350kg	80-90r/min	150kg/h



Momo Making Machine

- ✓ Safe and hygienic
- ✓ High yield rate
- ✓ Easy operation
- ✓ High production speed



GD-87



GD-S



GD-D

Product Description

The steamed stuffed bun machine will mainly put the mixed stuffing into its feed port, and start the machine to automatically produce steamed stuffed buns. Its advantages are the fast production speed, high yield rate, labor and time saving and product diversification and so on. It can be widely used in catering, canteen, school and fast food industry.

Technical Parameters

Model	Capacity	Dimension	Weight	Baozi Weight	Material	Power	Voltage
GD87	500-3000/h	1530*670*1650mm	300KG	15-200g	304 stainless steel	2.4KW	110v/220V
GD-S	500-3000/h	1400*610*1750mm	200KG	15-200g	304 stainless steel	2KW	110v/220V
GD-D	500-3000/h	1400*700*1750mm	200KG	15-200g	304 stainless steel	2KW	110v/220V

Dumpling Machine

- ✓ Time-saving
- ✓ Labor-saving
- ✓ Simple operation
- ✓ Easy disassembly



Product Description

It can produce all kinds of meat stuffing, meat and vegetable mixed stuffing, whole dish stuffing and other kinds of stuffing dumplings, can be used for steaming, boiling, frying and frozen food processing.

Technical Parameters

Model	Capacity	Power	Dumpling Weight	Weight	Voltage	Main Machine size	N.W.
GD-80	220v	2.2-2.5kw	80*50*65mm	90kg	100r/min	15-30 kg/h	100kg



Automatic Dumpling Wrapper Machine

- ✓ Safe and hygienic
- ✓ High yield rate
- ✓ Easy operation
- ✓ High production speed



Product Description

The dumpling wrapper machine is made of food-grade stainless steel, fully automatic system, easy to maintain and easy to operate. The machine can be used to make dumpling wrappers of various sizes. The machine can automatically feed, sprinkle flour to prevent sticking, automatically form, and automatically convey. With the rotation of the roller, the leftover material will be automatically recovered and reused.

Technical Parameters

Model	Size	Weight	Output	Power	Dumpling skin Diameter
GD-160 Single	1250*450*1050mm	180kg	3000 pcs/h Can be adjusted and customized	2.2kw	D 4-14 cm
GD-260 Double	1250*550*1050mm	240kg	6000 pcs/h Can be adjusted and customized	2.2kw	D 4-14 cm

Dumpling wrapper making machine

- ✔ Small size
- ✔ Light weight
- ✔ Foldable
- ✔ Easy to move



Product Description

This is the Table Top dumpling skin making machine, which is the newest small dumpling wrapper maker can make round and square style dumpling wrapper just by changing the moulds. Non-standard can be customized.

Technical Parameters

Model	Capacity	Power	Size	Weight	Voltage
GD-S	1500-2000pcs/hour	300w	220v	300*520*400mm	50kg
GD-M	1500 pcs/hour	140w	220v	58*30*30cm	18kg



Pizza Making Machine

- ✓ Simple operation
- ✓ High production efficiency
- ✓ Molding standard
- ✓ Finished product standard



GD-T



GD-SA



GD-FA



GD-O

Product Description

Pizza making machine is simple in structure, easy to operate and high in efficiency. It can produce cakes of different sizes by changing the mold. The maximum diameter can reach 30cm. The finished product standard is the preferred machine for making pizza.

Technical Parameters

Model	Power	Voltage	Size	Weight	Capacity	Size of pizza
GD-T	400w	220v	220*60*130cm	60kg	360 piece / h	<=30cm
GD-SA	170w	220v	160*55*120cm	90kg	360 piece / h	<=30cm
GD-FA	400w	220v	220*60*130cm	160kg	360 piece / h	<=30cm
GD-O1	250w	220v	60*40*46cm	75kg	1000-1500pcs/ h	<12cm
GD-O2	400w	220v	70*50*46cm	95kg	1000-1500pcs/ h	14-20cm
GD-O3	400w	220v	90*60*46cm	120kg	1000-1500pcs/ h	21-30cm

Pizza Dough Machine

- ✔ Fast and efficient
- ✔ Easy to operate
- ✔ Easy to clean
- ✔ Safe and hygienic



Product Description

The pizza machine is a food forming machine specially designed for pizza makers. It can make various shapes you want in a few seconds. The pizza forming machine adopts advanced manufacturing technology, which has low noise, stable operation, and Features such as high efficiency. In addition, the concise control makes the user's operation more convenient and improves the output.

Technical Parameters

Model	Pizza dia	Dough range	Power	Voltage	Machine size	Weight
APD-30	10-30cm(3-12inches)	50-500g	370w	220v50hz/110v	495x490x640mm	35kg
APD-40 (Semi-automatic)	10-40cm(3-15inches)	50-500g	370w	220v50hz/110v	530x530x650mm	39kg



Automatic Tortilla Machine

- ✓ Simple operation
- ✓ High production efficiency
- ✓ Molding standard
- ✓ Finished product standard



Product Description

This machine is a variety of fabrics through the motor uniform speed to drive the surface extrusion device, uniform output. The cylindrical rod stock is then cut and formed by the knife mechanism. After the on. Lower pressure plate, pre-press molding, enter on. Lower the baking pan and then enter the air to cool and sprinkle the powder. This machine is equipped with a flour feeding mechanism, through the operation of the motor and brush, so that the flour is evenly sprinkled on the cake, which has a preventive adhesion effect on the viscous product. The lower vias adjust the size of the powder volume to meet the appropriate requirements.

Technical Parameters

Model	Capacity	Size	Voltage	Weight	Power	Finished thickness	Finished diameter
GD350	9-10kg/h	1.5*0.6*1.2m	380v	100kg	5—7kw	0.4—2.5mm	18—30cm
GD450	35KG/H	5.3*0.8*1.4m Main machine:2.8m Auxiliary machine:2.5m	380V	500KG	20KW	0.4—2.5mm	15—40cm
GD650	75KG/H	5.3*0.8*1.4m Main machine:2.8m Auxiliary machine:2.5m	380V	75KG/H	30KW	0.4—2.5mm	18—30cm

Small Tortilla Machine

- ✔ Small space area
- ✔ Easy operation
- ✔ Speed and thickness can be adjusted
- ✔ Non-sticky. No waste.



Product Description

Commercial corn tortilla making machine has two groups rollers to press the big corn dough into smooth sheet structure with appropriate thickness, then the sheet dough will be cut by forming mold roller into different shapes of tortilla. With the rotation of rollers, leftover bits are automatically recycled and reused.

The machine has the characteristics of small occupation area, easy to move, simple operation, time-saving and high efficient, simple maintenance and so on. The main components are motor, stainless roller, mold and conveyor.

Technical Parameters

Model	Size	Weight	Output	Power	Pastry Diameter
Stainless roller-big	880*560*540mm	85kg	1000-1500 pcs/h Can be adjusted and customized	400w	D 5-32 cm
Stainless roller-small	680*430*430mm	50kg	1000-1500 pcs/h Can be adjusted and customized	250w	D 5-18cm
Alloy iron roller-big	880*560*540mm	85kg	1000-1500 pcs/h Can be adjusted and customized	400w	D 5-32 cm
Ally iron roller-small	680*430*430mm	50kg	1000-1500 pcs/h Can be adjusted and customized	250w	D 5-18cm



Pita Bread Make Machine

- ✓ Fully automatic operation
- ✓ Easy operation
- ✓ Speed up to 60-120pcs/min
- ✓ High efficiency



Product Description

The pita bread machine is made of food-grade stainless steel, fully automatic system, easy maintenance and simple operation. The machine can be used to make a variety of dough such as tortillas, kebabs, pita bread, crepes, Arabic bread, etc. The dough machine has three sets of rollers, which press the large dough into flat dough sheets of suitable thickness, and then cut the dough sheets into various shapes of dough cakes by the mold.

The machine can automatically feed, sprinkle flour to prevent sticking, automatically form, and automatically convey. With the rotation of the roller, the leftover material will be automatically recovered and reused.

Technical Parameters

Model	Size	Weight	Output	Power	Dumpling skin Diameter
GD-160	1250*450*1050mm	180kg	3000 pcs/h Can be adjusted and customized	2.2kw	D 7-50 cm

Steamed Bread Machine

- ✔ The size of the dough is adjustable
- ✔ Low machine noise
- ✔ The finished product is uniform



Product Description

Disc type steamed bread machine, used for dough division, quickly produce uniform size of steamed bread. Mainly suitable for restaurants, colleges and universities, factories and mines, enterprises and business canteen, can be convenient and fast forming steamed bread. Disc type steamed bread machine, the production of steamed bread fast, uniform size, and has low noise, clean, hygienic, simple operation, easy maintenance and other characteristics, is an ideal steamed bread forming equipment.

Technical Parameters

Model	Size	Voltage	Power	Capacity	Weight	The weight of each steamed bun
GD-1	560*630*960mm	220V	2.2kw	60/min	400w	60-140g
GD-2	653*602*1011mm	220V	1.5kw	60/min	250w	50-150g
GD-3	630*720*1050mm	220V	1.5kw	60/min	400w	60-140g



Dough Kneading Machine

- ✓ Evenly mixing dough
- ✓ Liberating labor
- ✓ Large capacity
- ✓ Reliable quality



Product Description

The dough mixer is composed of mixing tank, stirring hook, transmission device, electrical box, base and other parts. The screw agitator is driven by the transmission device to rotate in the mixing tank, while the mixing tank is driven by the transmission device to rotate at a constant speed. The flour in the tank is continuously pushed, pulled, kneaded, pressed, fully mixed, and quickly mixed, so that the dry flour can be uniformly hydrated, expand the gluten, and become a dough with a certain degree of elasticity, flexibility and uniform flow.

Technical Parameters

	Model	Kneading flour weight/time	Power	Size
Manual Tipping Bucket	12.5I	12.5kgs	4kw	640x420x630mm
	20I	20kgs	4kw	760x600x850mm
	25III	25kgs	4kw	900x650x900mm
	30	30kgs	4kw	850x460x950mm
	50III	50kgs	4kw	1170x850x950mm
	50IV	50kgs	4kw	980x510x1010mm
	75I	75kgs	4kw	1100x680x1150mm
Fully Automatic Tipping Bucket	75III	75kgs	4kw	1170x720x1400mm
	100III	100kgs	4kw	1260x720x1400mm
	150II	150kgs	4kw	1420x770x1560mm

Food Mixer

- ✓ Large capacity barrel
- ✓ Copper motor
- ✓ Three gears freely adjustable



Product Description

The food mixer is a full gear transmission structure, and its power transmission system has a high standard design, high strength, high technical requirements, stable operation, strong and durable. Can be used for mixing cream, cake liquid, fillings, beating eggs and making dough, etc.

Technical Parameters

Model	Size	Voltage	Power	Output	Weight	Package dimensions	Package weight
YF-B10	45*37*60cm	220v/50HZ	500W	1kg	43kg	50.8*43.8*68.3cm	48kg
YF-B15	47*42*63cm	220v/50HZ	500W	1.5kg	46kg	53.8*43.8*72.2cm	51kg
YF-B20	53*41*78cm	220v/50HZ	1100W	5kg	62kg	59.5*48*89cm	70kg
YF-B30	57*45*78cm	220v/50HZ	1500W	6kg	72kg	63.5*52*89cm	78kg



Dough Press Machine

- ✓ Thickness adjustable
- ✓ High production capacity
- ✓ Easy operate labor source saving



Product Description

Dough kneading machine is suitable for processing pastries and breads, kneading and pressing various kinds of crisp and tough dough. Simply place the dough on the conveyor belt, and it can be automatically transported, kneaded and pressed after starting up. It can reduce the contact times between human hands and machines, eliminate the hidden danger of safety and reduce the labor intensity of workers.

Technical Parameters

Model	GD-350	GD-500
Max. capacity	300kg/h	500kg/h
Power	3kw	4kw
Roller size	114*350mm	140*500mm
Pressing surface width	<350mm	<500mm
Rotate speed	75r/min	79r/min
Pressing thickness	5-20mm	5-20mm
Dimension	1120*650*1100mm	1130*800*1100mm
Weight	160kg	180kg

Spring Roll Wrapper Making Machine

- ✔ Simple and safe operation
- ✔ High efficiency
- ✔ Multiple heating modes
- ✔ Can be customized
- ✔ R&D update and stability



Product Description

Using high quality cake mould, easy to use, non-stick surface. Integrated panel, fully functional, easy to operate. Stainless steel mesh chain conveyor belt, strong and durable, the skin is not adhesion. Cooling fan, fast air drying heat dissipation

Technical Parameters

Product name	Machine size	Heating power	Gas consumption	Motor power	Weight	Diameter	Production
Spring roll skin maker / roast duck cake maker	60*110* 120cm	8-15 kw	1.5kg/h	0.3kw	200kg	14.18,20.22 customized	2000 pcs/h



Dough Divider Machine

- ✓ Easy to operate
- ✓ Free offer 3 molds
- ✓ Dough weight can be adjustable
- ✓ 304 stainless steel material



Product Description

Our dough divider is mainly used to cut the dough into equal Numbers of dough balls. The dough divider is a machine for various kinds of Flour products, such as biscuits, buns, dumplings, bread, moon cakes, etc. The processed dough is well formed, the shape is smooth, the effect is good, and the soft surface processing effect is remarkable. The dough is processed by extrusion, conveying and cutting.

Technical Parameters

Voltage	Power	Production	Weight	Size
220v/50hz	2.5kw	100-200kg	100kg	70/46/97cm

Dough sheeter machine

- ✔️ Folded structure design
- ✔️ Roller for seamless steel tube
- ✔️ Universal machine wheel
- ✔️ Intelligent frequency conversion



Desktop dough sheeter machine



Vertical dough sheeter machine



Product Description

Dough sheeter is using imported components, the best steel, the pressing roller through a special treatment, not sticking to dough, and not easy be scratched; and made of special materials and manufacturing process, low noise, easy to wear, durable; Pressure roller and scraper with a professional design, uniform thickness, so that the thickness of dough to the best results.

Technical Parameters

Model	Voltage (V)	Power(KW)	Conveyor(mm)	Nip Roller Spacing(mm)	Rolling Amount(KG)	Dimensions(mm)	Weight(KG)
GD-VDSM-SP420	110/220/380	0.75	400*1700	1-50	4	855*2020*1285	260
GD-VDSM-SP520	110/220/380	0.75	500*2000	1-50	5	955*2520*1285	300
GD-VDSM-SP630	110/220/380	0.75	610*2800	1-50	6.5	1055*3320*1285	350
GD-DDSM-SP420	110/220/380	0.4	400*1700	1-50	4	1900*800*700	110
GD-DDSM-SP520	110/220/380	0.75	500*2000	1-50	5	2340*880*1230	240



Dough divider rounder machine

- ✓ Easy operation
- ✓ Grams adjustable
- ✓ Split evenly, rapid prototyping
- ✓ Food grade stainless steel material



Semi-automatic



Fully automatic

Product Description

Dough divider rounder machine is a machine that integrates dough cutting, rounding and forming. It is mainly divided into two types: automatic and semi-automatic. It can be divided into dough with uniform shape and equal weight, which can save labor and eliminate the difference caused by labor, greatly improving production efficiency.

Technical Parameters

Product type	Semi-automatic	Automatic
Dimension	580*740*1360mm	680*600*2060mm
Voltage	220V/380V	220V/380V
Power	0.75KW	1.5KW
Weight of single dough	30-100g/20-70g	30-100g/20-70g
Capacity	30/36pcs/times	30/36pcs/times
Molding time	6-10seconds/times	6-10seconds/times
Net weight	288KG	570KG
Standard equipped	Three plastic moulding plates	Three plastic moulding plates



Vertical semi-automatic shumai machine

- ✓ High efficient
- ✓ Compact structure
- ✓ Simple operation
- ✓ Good finished product



Product Description

The vertical semi-automatic siu mai machine is used to produce siu mai with different sizes and fillings. It is mainly composed of a stuffing device, a forming turntable device, a control panel and a machine frame. The operator needs to put the stuffing into the stuffing hopper of the machine, then put the handmade dough wrapper on the forming turntable, and start the machine to produce the finished siu mai. This machine has the advantages of fast production speed, good quality of finished products, saving time and effort Etc;



GD-VSASM



GD-FADRSM



GD-DSASM

Technical Parameters

Name	Vertical semi-automatic shumai machine	Fully automatic double row shumai machine	Desktop semi-automatic shumai machine
Modle	GD-VSASM	GD-FADRSM	GD-DSASM
Voltage	220V	220V	220V
Output	800-1800PCS/H	800-1800PCS/H	5500PCS/H
Each shumai weight	12-60g	14-60g	12-55g
Power	300w	870w	2800w
Size	750*400*930mm	805*525*1650mm	1150*1300*1800mm
Weight	100kg	200kg	800kg

Desktop siomai making machine

- ✓

Easy to use
- ✓

Small footprint
- ✓

High efficiency
- ✓

Safe and reliable



Product Description

The desktop siomai making machine is mainly used to make siu mai stuffed with different vegetables and meat, corn and meat stuffing. It has the characteristics of long service life and simple operation.

Technical Parameters

Modle	GD-SM-001	GD-SM-002
Voltage	110V/220	110V/220
Output	900-1200pcs	900-1200pcs
Power	200W	200W
Size	410*365*550mm	410*365*550mm
Weight	25kg	25kg



Hydraulic pancake machine

- ✔ One-key start
- ✔ Adjustable thickness
- ✔ Adjustable temperature
- ✔ Making pancake in three seconds



Product Description

The hydraulic pancake machine is a pancake machine that is heated by electricity. It is composed of main components such as a frame, a forming mold, a hydraulic device, a heating device, and a temperature control system. The operator only needs to set the heating temperature and heating time according to the needs of pancakes. The temperature control meter will display the heating temperature of the upper and lower pancakes. When the set temperature is reached, the heating will automatically stop.

Technical Parameters

Model	Voltage	Power	Weight	Size	Pancake Size
GD-35	220v/380v	2.2kw	125kg	70*55*125cm	<=35cm
GD-40			175kg	75*63*125cm	<=40cm
GD-50			200kg	75*63*125cm	<=50cm
GD-60	380v	3kw	256kg	99*94*125cm	<=60cm
GD-70			300kg	100*95*125cm	<=70cm
GD-80			350kg	115*105*125cm	<=80cm

Grain Processing Machine



Corn grits milling machine

- ✓ Energy saving
- ✓ Unique structure
- ✓ Easy operating
- ✓ Hulling /grinding grits / flour millings



Product Description

Corn grits milling machine is small in size and easy to operate. It is mainly used for dehulling and grinding of corn, wheat, barley and other cereals, rice and sorghum. Processing improves the taste of corn and expands the application range of corn. Processed corn grits and corn flour are very popular.

Corn grits milling machine has added a new ventilation and dust removal system, a stepless crushing system, a current display system and an automatic adjustment system for the air outlet. Using wet dust removal, refined corn grits, corn flour and other varieties. It is suitable for the needs of peeling, crushing and grinding of small and medium-sized grain processing plants such as wheat, rice, corn, sorghum, etc. And the processed finished products can directly enter the market for sale.

Technical Parameters

Model	Output(kg/h)		Power(kw)	Spindle speed(r/min)	Weight(kg)	Machine size(mm)
GD-35	Corn peeling 800	Corn grits 1000	11	1042	350	2140*1130*1200
GD-50	Corn peeling 300	Corn grits 500	7.5	860	300	2200*500*1200



Grinding Production Line

- ✓ Complete function
- ✓ Low noise
- ✓ No dust
- ✓ High automation



Product Description

This Grinding flour mill machine can be used for processing wheat/corn in personal and family small flour mills, and also for processing other grains in food factories, such as cocoa beans, sorghum, soybeans, oat and so on. The equipment adopts air lift, grinding roller, screen distribution and closing, high efficiency, stable performance, no dust overflow, low energy consumption, easy maintenance.

Technical Parameters

Model	Output(kg/h)	Weight(kg)	Dimension(mm)	Power(kw)
6F2235	200~350	800	2200*900*3150	7.5+3
6F2240	300~450	900	2250*1000*3150	11+3
6F2250	400~550	1000	2350*1000*3150	15+4

Mill Grinder

- ✓ Stainless steel body
- ✓ Removable design
- ✓ Easy to operate
- ✓ Powerful copper motor



Product Description

This stainless steel grain mill is mainly used to grind grain, herb, chemical, and it also widely used in cacao, walnut, soybean, in addition, it can also be used in milling rice, oat, corn...etc.



Technical Parameters

Model	Motor	Capacity	Speed of max axis	Machine size	Machine net weight	Input product size	Output product size
GD-30	2.2kw	25~50kg/h	1420r/min	570*270*450mm	50kg	10~30 mm	50~200 mesh
GD-60	3kw	60~70kg/h	1420r/min	570*270*450mm	60kg	10~30 mm	50~200 mesh

Meat Processing Machinery



Pork peeling machine

- ✓ Overall stainless steel design
- ✓ Adjustable peeling thickness
- ✓ Accurate machine structure
- ✓ Smooth operation and low noise



Product Description

Pork skinning machine, the equipment is easy to operate, and the thickness of the skin can be adjusted. The body is made of stainless steel with high strength. The pork peeling machine is mainly used for the sebum separation of various cut meats. The machine is equipped with an automatic peeling device, which is suitable for peeling various meat shapes without loss of meat. The skin and flesh separation effect is good.

Technical Parameters

Model	Power	Size	Blade length	Cutting width	Processing thickness	Yield	Weight
GD-300	370w	650*620*480mm	300*20*1mm	300mm	0.6-6mm	18m/min	55KG
GD-435	2p/3p*220v/380v*750w	750*710*880mm	434*20*1mm	435mm	0.6-6mm	24m/min	130KG
GD-500	2p/3p*220v/380v*750w	870*710*920mm	499*20*1mm	500mm	0.6-6mm	24m/min	158KG
GD-620	2p/3p*220v/380v*750w	970*820*930mm	620*20*1mm	620mm	0.6-6mm	24m/min	186KG

Meat flattening machine

- ✓ Stable operation
- ✓ SUS 304 machine material
- ✓ Guaranteed quality
- ✓ With reliable safety protection device



PLC automatic meat flattening machine



Mechanical meat flattening machine



Product Description

Meat flattening machine is to pass fresh or frozen raw meat through 6 pressure rollers to roll the product to the specified thickness, increase the surface area of the product, so as to achieve the same aging time and shorten the frying time. The equipment is suitable for all poultry, beef, pork, fish, potatoes, cheese, etc. with a thickness less than 30mm

Technical Parameters

Model	Calendering thickness	Conveyor speed	Belt width	Power	Size(mm)
GD-S400	Adjustable 3-30mm	Adjustable 3~15m/min	400mm	1.5kw	2135×715×1320
GD-S600			600mm	1.5kw	2135×915×1320
GD-A400			400mm	3.3kw	2300×1400×1600
GD-A600			600mm	3.3kw	2300×1400×1600



Bone and meat separator machine

- ✓ Large feeding port
- ✓ Overall 304 stainless steel
- ✓ Customizable separation filter element



Product Description

The debone machine is mainly suitable for separating the flesh and bones of poultry, such as chicken, duck, goose, rabbit, turkey, etc. It is suitable for fried sausage, bacon, dumpling stuffing, luncheon meat, chicken nuggets, meat pie, meatballs, meat sauce, etc.

Technical Parameters

Model	Voltage	Motor power	Yield	Machine size	Weight
GD-BAMSM-H300	380v	7.5kw	300-500kg/h	1400*650*980mm	400KG
GD-BAMSM-A80	380v	5.5kw	200-300kg/h	1400*650*900mm	400KG
GD-BAMSM-A130	380v	13/16kw	1000-1500kg/h	1990*820*1300mm	850KG
GD-BAMSM-A160	380v	22/28kw	2000-3000kg/h	2130*890*1400mm	1350KG
GD-BAMSM-A180	380v	26/32kw	3500-4500kg/h	2420*1200*1500mm	1650KG
GD-BAMSM-A220	380v	55kw	6000-8000kg/h	2700*1450*1650mm	2150KG

Saline Injection Machine

- ✓ Easy to clean
- ✓ Reasonable structure
- ✓ Easy to operate
- ✓ Wide range of adaptation



Semi—automatic brine injection



Automatic brine injection



Product Description

Saline injection machine is mainly used for saline, soybean protein, starch, fat and other auxiliary materials evenly injected into the meat, full penetration, pickling

Technical Parameters

Model	Power	Capacity	Injection	Power	Injection speed	Machine size
ZYZ-48	4.1kw	300kg	0.45-0.9mpa	380v	40-70m/min	1350x750x1650mm
ZYZ-80	5.1kw	700kg	0.45-0.9mpa	380v	40-70m/min	1550x880x1650mm
ZYZ-120	6.2kw	900kg	0.45-0.9mpa	380v	40-70m/min	1850x1350x1800mm

Frozen Meat Grinder

- ✓ SUS304 stainless steel
- ✓ Low noise, stable performance
- ✓ High speed and efficiency
- ✓ Easy clean



Product Description

This machine is an essential equipment for meat processing. It can directly mince the unfrozen meat pieces to make meat granules of different specifications, so as to do the preparatory work for chopping or stirring. Since there is no need to thaw, the nutrition and meat umami are maintained.

Technical Parameters

Model	Power	Size	Capacity
GD-100	5.5kw	84*84*350mm	500kg/h
GD-120	7.5kw	120*120*550mm	1500kg/h
GD-160	18.5kw	1630*1100*1450mm	2000-3000kg/h



Vacuum Meat Mixer

- ✓ High quality stainless steel
- ✓ CNC machined parts
- ✓ Simple and safe operation
- ✓ Applicable to multiple industries



Product Description

Vacuum meat mixer is simple in structure, easy to operate and high in efficiency. It is developed in accordance with the characteristics of my country's meat processing technology. This machine can be used for stirring and mixing stuffing, bulk and sauce materials, which is an important process in food production.

Technical Parameters

Model	Power	Capacity	Weight	Weight
GD-50	50kg	1.1kw	100kg	820*380*760mm
GD-100	100kg	1.5kw	200kg	1300*510*910mm
GD-150	150kg	1.75kw	260kg	1470*520*910mm
GD-200	200kg	2.2kw	300kg	1550*690*1140mm
GD-300	300kg	3kw	350kg	1630*730*1250mm



Frozen Meat Cut Machine

- ✓ Stainless steel body
- ✓ Toothed blade
- ✓ Side slicing
- ✓ Easy to clean



Product Description

The frozen meat dicing machine is made of food-grade stainless steel with simple structure. The cutter adopts double-edged cutting, which has high working efficiency. The blade is specially treated, sharp and durable, and it is an excellent equipment in food processing.

Technical Parameters

Model	Power	Capacity	Cutting groove size	Voltage	Machine size
QD-350	3kw	500-600kg	84*84*350mm	380v	1480x800x980mm
QD-550	3.7kw	700-900kg	120*120*550mm	380v	1940x980x1100mm

Bone Saw Machine

- ✓ Different sizes to choose
- ✓ Safety lever
- ✓ Saw band stability
- ✓ Precise temperature control



Product Description

The bone sawing machine is composed of a frame, a motor, a circular saw, a translation table, and an electric control work board. It is suitable for all kinds of small and medium-sized animal bones, frozen meat, fish bones, frozen fish, ice processing, and small pieces of frozen meat. , Cutting of ribs, etc.



QD-J120



QD-280



QD-310




QD-400

Technical Parameters

Model	Operating table(cm)	Saw moving speed	Weight	Power	Dimension	Voltage	Cutting thickness(cm)	Sawing height(cm)	Applicable food
QD-J120	51*35.5cm	12m/s	34kg	900w	50*40*72cm	220/110v	0-12	20	Pork bones, fish, Chicken, frozen meat etc
QD-280	49*38cm	15m/s	40kg	1.5kw	50*50*89cm	220/110v	0-18	25	Beef bone, lamb bone, fish, Chicken, frozen meat etc
QD-310	68*47cm	20m/s	66kg	1.5kw	50*40*72cm	220/110v	0-20	30	Beef bone, lamb bone, Chicken, fish, frozen meat etc
QD-400	90*96cm	34m/s	220KG	2.2kw	50*40*72cm	220/110v	0-36	43.5	Whole pig and whole sheep, frozen meat, etc

Hamburger Patty Forming Machine

- ✓ Large capacity
- ✓ High output
- ✓ Food grade stainless steel material

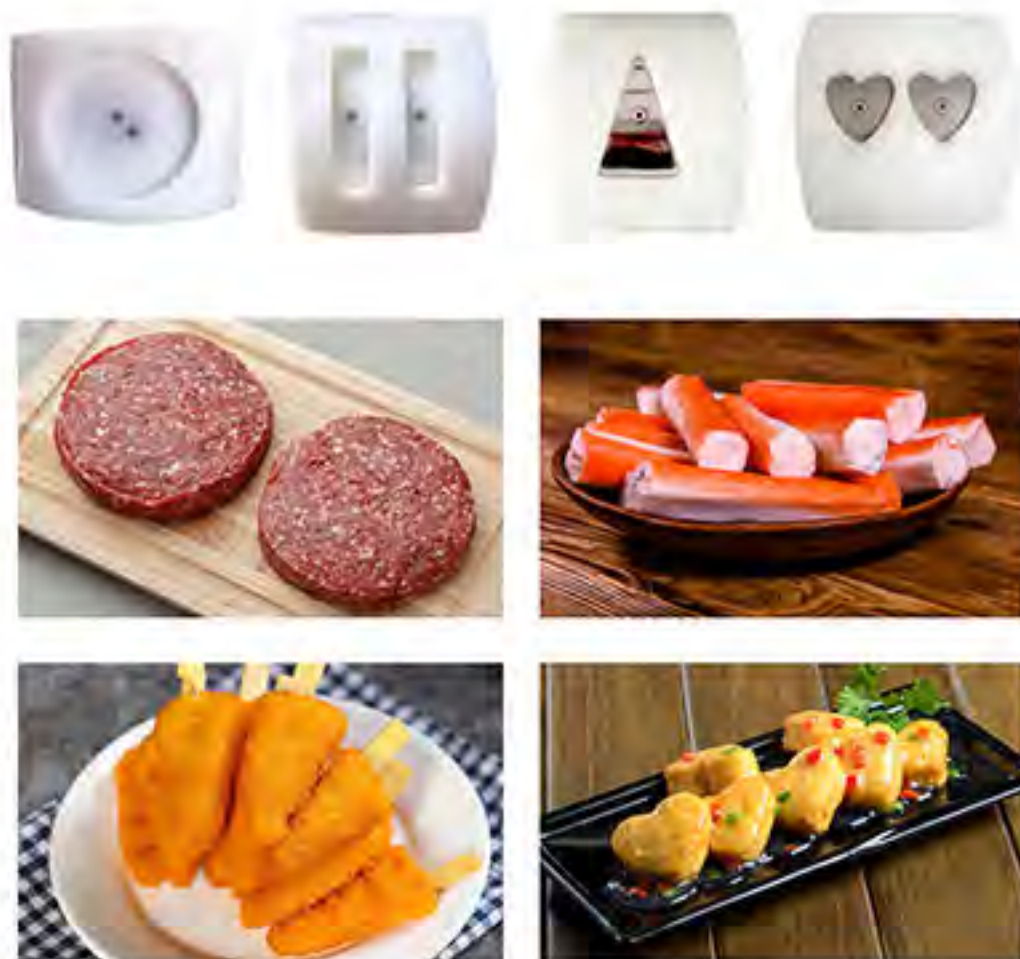

Product Description

The automatic patty forming machine can automatically complete the filling, forming, pasting, output and other processes of fillings, and can produce popular hamburger patties, chicken McNuggets, fish-flavored hamburger patties, pumpkin pies, meat skewers and other products, It is an ideal meat (vegetable) forming equipment for fast food restaurants, distribution centers and food factories.

Technical Parameters

Model	GD-100
Voltage	220/380v
Power	0.55KW
Yield	35 pcs/min
Size	860*600*1400mm
Machine weight	100kg
Barrel capacity	30L
Conveyor belt width	130mm
Product diameter	30-100mm
Product thickness	6-16mm



Meatball Making Machine

- ✓ Highly automated
- ✓ Easy to clean
- ✓ Easy to use



Product Description

Hamburger patty production line is highly automated, easy to use, easy to clean, can automatically complete the hamburger patty forming, sizing, powder wrapping, scraping and other processes. The new hamburger patty production line is suitable for meat, fish, shrimp, vegetables and other raw materials. It can produce popular hamburger patties, McNuggets, fish flavored hamburger patties, potato patties, pumpkin patties, meat kebabs and other products on the market. It is an ideal equipment for fast food restaurants, distribution centers and food factories.

Technical Parameters

Burger patty forming machine										
Model	Voltage	Power	Yield	Size	Weight	Barrel capacity	Conveyor belt width	Product diameter	Product thickness	Maximum current
GD-100	220/380v	0.55kw	35 pcs/min	860*600*1400mm	100kg	30L	130mm	30-100mm	6-16mm	16A

Burger sizing machine									
Model	Voltage	Power	Size	Input high	Input width	Network bandwidth	Yield	Weight	
XJT-SJ200	380/220v	0.86kw	1720*650*1400mm	780mm	780mm	200mm	100kg/h	150kg	

Burger reading machine									
Model	Voltage	Power	Size	Input high	Input width	Network bandwidth	Yield	Weight	
XJT-SJ200	380/220v	0.62kw	1720*650*1400mm	780mm	780mm	200mm	100kg/h	100kg	



Cooked Meat Slicer Machine

- ✓ Various functions
- ✓ Uniform cutting
- ✓ Adjustable thickness
- ✓ Stainless steel body



Product Description

The cooked meat slicer machine adopts three special blades to cut cooked pork, bacon, sausage, ham, beef, steak and other cooked meat into strips and slices. The discharge port is connected to the conveyor belt, so that the cut meat is placed neatly, and can be directly loaded into the tray without arranging. The Cooked meat slicer machine is suitable for fast food industry, supermarket, large canteen, and food industry.

Technical Parameters

Model	GD-120
Output	300-800kg
Size	1350*680*1250mm
Machine weight	160kg
Voltage	380v/50hz
Power	1.5kw
Cutting thickness	0-20/0-40mm
Feeding belt width	140mm
Discharge belt width	150mm
Material	Stainless steel 304

Beef and Mutton Cutting Roll Machine

- ✓ High efficiency
- ✓ Simple operation
- ✓ Stainless steel casing
- ✓ Good safety performance



Product Description

The beef and mutton cutting roll machine is divided into 16 rolls, 8 rolls, 4 rolls, 2 rolls, fully automatic flat cutting 2 rolls, and flat cutting 1 roll. It adopts double stack cutting, touch screen operation, PLC control, servo motor drive, double screw horizontal feeding, cutting height of 20cm, and fully automatic operation.

The beef and mutton cutting roll machine adopts electric pushing and thickness adjustment. After the meat is processed, the cutting knife automatically stops, and the pushing plate automatically moves back and stops.

The automation level of the beef and mutton cutting roll machine is high, and the cutting of meat slices, thickness adjustment, meat roll conveying, and automatic shutdown can all be completed with one click.

Technical Parameters

Model	GD-200	GD-400	GD-600	GD-800
Capacity	300kg/h	600kg/h	900kg/h	1200kg/h
Size	1500*555*1270mm	1500*795*1270mm	1500*1010*1270mm	1500*1320*1270mm
Weight	95kg	100kg	150kg	120kg
Power	2200w	3000w	3000w	4000w




Fresh Meat Slicer

- ✓ Easy clean
- ✓ Stable operation
- ✓ Adjustable speed
- ✓ Guaranteed quality



GD-400

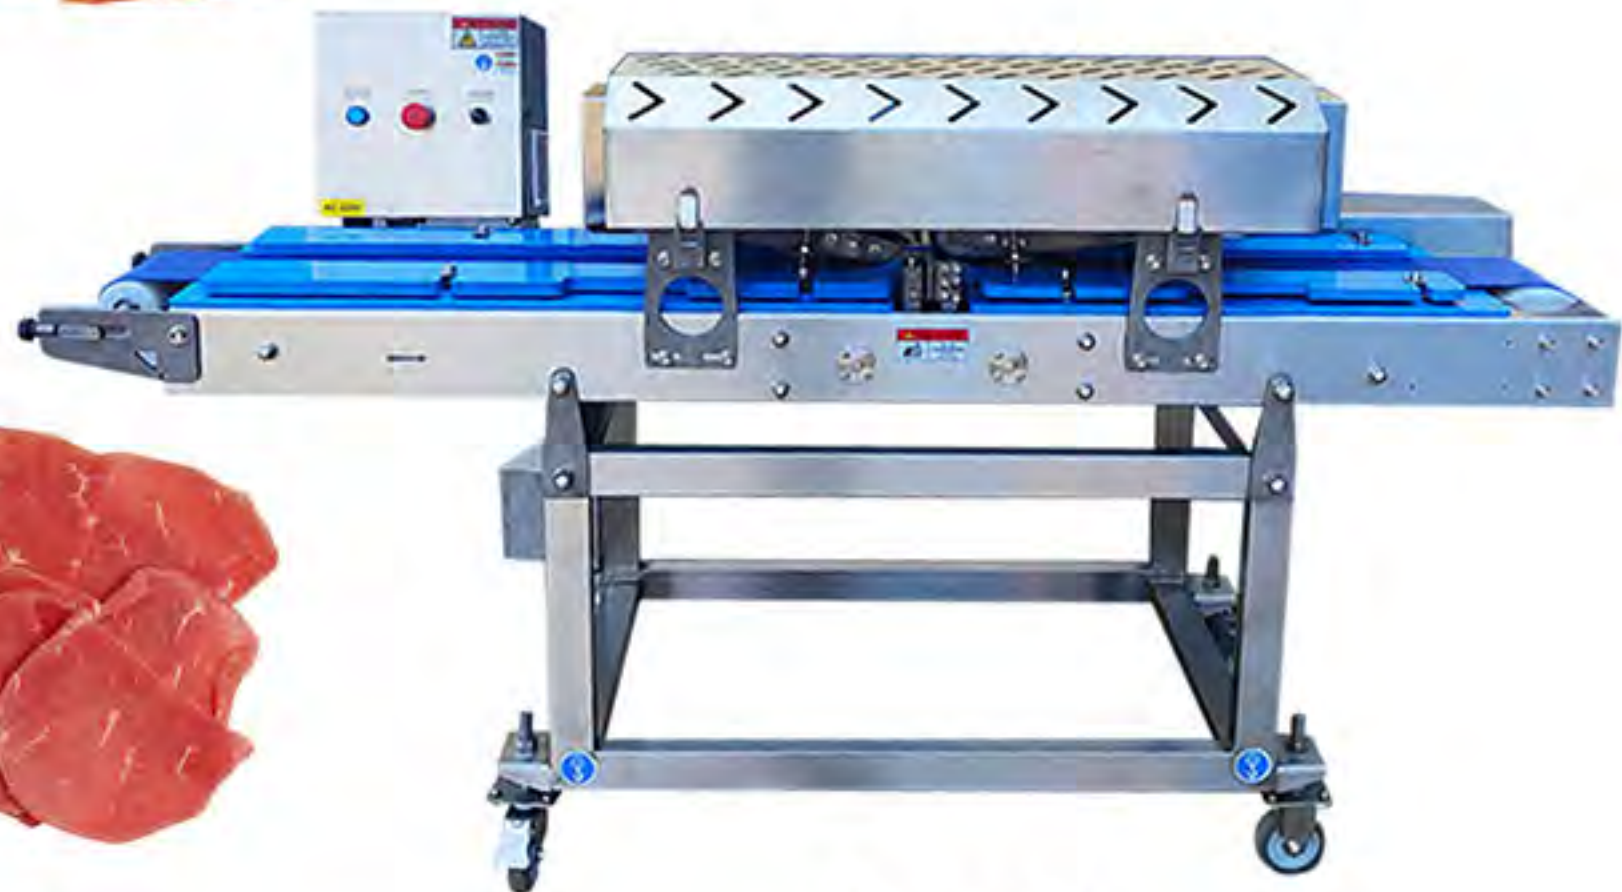

GD-500

Product Description

The fresh meat slicer is used for cutting fresh raw materials such as chicken and beef, and is suitable for meat processing plants, large catering enterprises, etc. The fresh meat slicer can accurately cut the thickness, multi-layer slices, high efficiency, high output, long service life, simple operation and so on.

Technical Parameters

Model	Capacity	Power	Cutting thickness	Size	Weight
GD-400	400-500kg/h	2.25kw	0.05-20mm	2000*950*1230mm	450kg
GD-500	500-700kg/h	1.65kw	2.5-20mm	2100*680*1300mm	300kg

Frozen Meat Slicer

- ✓ Convenient and quick
- ✓ Clean and hygienic
- ✓ Helping food production



Product Description

This machine is an essential equipment for meat processing. The machine uses a circular knife to rotate and cut the meat. The meat is repeatedly pushed to the cutting knife by the automatic pushing device, and the cut frozen meat is collected from the bottom of the blade.

Technical Parameters

Model	8 Inch Semi-automatic B200B	10 Inch Semi-automatic B250B	12 Inch Full-automatic B300B	10 Inch Semi-automatic B320B	14 Inch Full-automatic Vertical B360B
Power	210W	240W	180/370W	750W/370W	750W/750W
Voltage	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/380V
Net Weight	14kg	14kg	46kg	95kg	230kg
Size	41*40*35cm	47*42*39cm	52*45*66cm	78*56*74cm	102*72*145cm
Blade diameter	200mm	250mm	300mm	320mm	360mm
Slice thickness	0-13mm	0-13mm	0-6mm	0-15mm	0-20mm
Cut off stroke	150mm	185mm	170mm	220mm	320mm
Slicing speed	/		48 times/min		38-50 times/min



Hairtail cutting machine

- ✓ Neatly cut
- ✓ High output
- ✓ Automatic cutting
- ✓ Different parts different outlets



Product Description

Hairtail cutting machine is made of food-grade stainless steel, which has the advantages of no easy to rust and corrosion. The knife is made of special manganese steel, which is suitable for cutting hairtail and anchovies, and has a long service life. The equipment has the advantages of compact design, beautiful appearance, easy operation, low power consumption, and good bone sawing effect. The length of hairtail and anchovies can be adjusted, and different lengths of hairtail cutting machine can be customized according to user needs. The equipment has a wide range of uses, not only can cut hairtail, but also can cut other types of fish, and the size can be customized according to requirements, which is convenient and practical.

Technical Parameters

Model	Capacity	Size	Weight
GD-1	1000kg/h	1360*1170*1060mm	165kg
GD-2	200kg/h	1100*500*850mm	100kg

Oblique fish fillet machine

- ✔ Stir evenly
- ✔ High efficiency
- ✔ Slice thickness is uniform



Product Description

Oblique fish fillet machine is mainly used for various fish slices. It adopts the principle of multiple sets of blades to cut obliquely at the same time, and cuts the fish into thin and uniform slices. It has the characteristics of long service life and simple operation.

Technical Parameters

Model	GD-1	GD-2
Voltage	110V/220V/380V	110V/220V/380V
Blade diameter	355*18	460*18
Power	1.5kw	1.5kw
Size	840*740*900mm	840*900*900mm
Weight	260kg	270kg

Fish killing machine

- ✓ Scaling and visceral removal are effective
- ✓ To remove scales and kill fish
- ✓ Stainless steel material
- ✓ Easy to operate



Open back and belly fish killing machine



Scale-removing and back-removing fish killing machine



Product Description

Automatic fish killing machine has both the function of removing scales and opening the chamber, and the effect of removing scales is excellent, and does not affect the appearance of the fish. Cut mouth smooth, beautiful, do not tear fish, do not break fish bile, processing time is short, high efficiency, can replace manual operation, reduce labor and safety risks.

Technical Parameters

Model	Range from	Power	Size	Processing speed	Weight
GD-FKM1	Adjustable 0.5-4kg	2.2kw	1600×500×850mm	1-3seconds/pcs	120kg
GD-FKM2	Adjustable 1-4kg	1.5kw	600×600×950mm	5-8seconds/pcs	140kg

Meatball making machine

- ✓ Low noise
- ✓ Handmade taste
- ✓ Adjustable meatball size
- ✓ Efficient meatball production



GD-XMBM-SX120



GD-XMBM-SX160



GD-XMBM-SXBT



GD-XMBM-SZT



GD-XMBM-H

Product Description

Meatball machine is suitable for making all kinds of crisp, tough and elastic pork ball, fish ball, beef ball, chicken ball, hot pot ball, etc. It is suitable for meatball making individual processor, catering, hot pot material, food factory. Meatball molding machine has the characteristics of fast speed of pill making, low usage rate of filling, customizable pill size, etc. It is an ideal pill making equipment. Meatball molding machine has a simple structure, easy to operate, the body is made of stainless steel easy to clean, to ensure food hygiene.

Technical Parameters

Model	Capacity	Size	Weight	Output
GD-MBMM-SX120	260pcs/min	660*370*1170mm	75kg	1.5kw
GD-MBMM-SX160	260pcs/min	650*370*1600mm	80kg	1.5kw
GD-MBMM-SXBT	400-600pcs/min	900*510*1780mm	190kg	1.5kw
GD-MBMM-SZT	160pcs/min	440*780*1600mm	120kg	2.2kw
GD-XMBM-H	200pcs/min	720*620*1580mm	198kg	1.5kw



Sausage production line

- ✓ Good quality
- ✓ Fast and efficient operation
- ✓ Low noise
- ✓ SUS304 stainless steel body



Product Description

Automatic sausage production line machine is from meat processing to cooked sausage process. We can supply different kinds of production line according to sausage casing type and production capacity requirements of our customers. Sausage production line, include Frozen meat Grinder, meat Bowl Cutter machine, meat Mixer(as need), Sausage Stuffing and Filling Machine, Smoker Oven, package machine and so on.

Technical Parameters

Machine	Model	Size(mm)	Power
Meat grinder	GY-100	850*500*860	5.5kw
Meat bowl cutter	GY-100	1200*450*850	1.5kw
Sausage filling machine	GY-30	1050*670*1680	1.5kw
Sausage tying machine	Fully automatic single-waybinding machine	1100*500*900	2kw
Smoke oven	GY-100	1200*1700*2140	17.2kw
Vacuum packing machine	DZ-600	1300*700*600	2.25kw

Sausage binding machine

- ✓

Good quality
- ✓

Low noise
- ✓

Stable operation
- ✓

Guaranteed quality



Semi-automatic binding machine



Fully automatic single-way binding machine



Fully automatic two-way binding machine



Product Description

The sausage binding machine is made of food-grade SUS304 stainless steel, small in size, high in efficiency and easy to operate. The control system is composed of a touch screen and a servo control system. It has two production modes: manual and automatic continuous. In the automatic continuous mode, the production efficiency is higher, saving time and effort. The intuitive touch screen control screen can set the production speed, the number of laps of thread binding, the time of dragging intestines and other parameters, and can also carry out output statistics on production. It has the incomparable advantages of traditional semi-automatic binding machines, and has high cost performance. The mechanical structure adopts numerical control processing, which is compact in structure, high in precision, and has a good waterproof function. The almost maintenance-free structure makes your production worry-free. It is the best choice for small and medium-sized food enterprises.

Technical Parameters

Model	Voltage	Power	Productivity (section/min)	Single casing size (mm)	Adapt casing diameter(mm)	Size(mm)	Weight
GD-S	220V	1.5kw	10-100 adjustable	30-300	φ9-35	1100*500*900	88kg
GD-AS	220V	2kw	10-100 adjustable	30-300	φ9-35	1100*500*900	100kg
GD-AD	220V	3.5kw	10-450 adjustable	10-300	φ9-28	1100*850*1250	280kg

Hydraulic Enema Machine

- ✓ Easy to operation
- ✓ Stainless steel structure
- ✓ Visual pressure gauge
- ✓ Multiple specifications



Product Description

Our hydraulic enema machine is mainly suitable for processing meat products, filling sausages, sausages, ham sausages and other products, suitable for meat processing enterprises, individual industrial and commercial households, etc.

Technical Parameters

Model	Voltage	Power	Output	Dimension	Weight
GD-30	220/380V	2.2kw	300kg/h	800*650*1280mm	240kg
GD-32	220/380/110V	0.75kw	300kg/h	1500*565*1300mm	240kg
GD-50	220/380/110V	1.5kw	500kg/h	1020*730*1500mm	400kg

Dear Customer, Any question with our products , pls. let us know, we will recommend a suitable machine for you, according to your requirements with our best services. Provide customized services, OEM Service offer. Welcome Any inquire



Fumigation furnace

- ✓ Save time, fuel-efficient
- ✓ Easy operation
- ✓ Advanced design
- ✓ Safety economic



Product Description

The fumigation stove has the functions of cooking, drying, fumigation and coloring. It can be steamed, smoked a variety of dried beans, sausage, ham sausage, dried sausage, sausage, roast meat and a variety of chicken, duck, fish.

Technical Parameters

Model	Capacity	Power	Energy source	The car size	Body size	Machine Size
GD-50	50kg/h	14.2kw	Electricity	860*705*920mm	870*880*980mm	1120*1500*1750mm
GD-100	100kg/h	14.2kw	Electricity	910*910*1430mm	940*1050*1470mm	1200*1700*2140mm
GD-150	150kg/h	18kw	Electricity	1050*880*1600mm	1140*1060*1030mm	1300*1200*1850mm
GD-250	250kg/h	24kw	Electricity	1250*1050*1700mm	1300*1200*1850mm	1500*2100*2650mm

Pneumatic Sausage stuffing machine

- ✓ Automatic quantitative
- ✓ More convenient filling
- ✓ Automatic kink
- ✓ Easy to clean



Product Description

The sausage filling machine is a special machine for processing sausages and sausages with particles. This machine is used for quantitative filling, the weight of a single intestine is between 20-500 grams, the weight of the filling can be adjusted, the quantitative is accurate, and the error is less than 2%.

Technical Parameters

Model	Capacity	Hopper volum	Size	Kink Speed	Weight
GD-500	500kg/h	60 L	1050*600*1500mm	100 times/ min	180kg

Meat Mixer

- ✓ High quality stainless steel
- ✓ CNC machined parts
- ✓ Simple and safe operation
- ✓ Applicable to multiple industries



Product Description

Meat Mixer is simple in structure, easy to operate and high in efficiency. It is developed in accordance with the characteristics of my country's meat processing technology. This machine can be used for stirring and mixing stuffing, bulk and sauce materials, which is an important process in food production.

Technical Parameters

Model	Power	Capacity	Weight	Weight
GD-50	50kg	1.1kw	100kg	820*380*760mm
GD-100	100kg	1.5kw	200kg	1300*510*910mm
GD-150	150kg	1.75kw	260kg	1470*520*910mm
GD-200	200kg	2.2kw	300kg	1550*690*1140mm
GD-300	300kg	3kw	350kg	1630*730*1250mm



Meat Chopper Machine

- ✓ Convenient and quick
- ✓ High efficiency and stability
- ✓ Respond to multiple needs
- ✓ SUS 304 high-quality stainless steel



Product Description

Meat bowl cutter machine is the key equipment in the production process of meat products. The high-speed rotating chopping and mixing knife can cut and mix the raw meat into fine minced shape, and can mix other auxiliary materials evenly. The high-speed rotation of the chopper can shorten the running time, reduce the calorific value of the material, and maintain the natural color, elasticity, yield and shelf life of the stuffing.

Technical Parameters

Model	Power	Capacity	Weight	Weight
GD-20L	4.1kw	15kg/pot	400kg	780*600*850mm
GD-40L	5.1kw	35kg/pot	1040kg	1100*830*1080mm
GD-80L	16.5kw	70kg/pot	1450kg	1820*1380*1260mm
GD-125L	31kw	110kg/pot	1800kg	2020*1450*1300mm

Baking Equipment



Peanut Roasting Machine

- ✓ Convenient operation
- ✓ Large capacity
- ✓ High efficiency
- ✓ Electric heating or gas heating



Product Description

This commercial groundnut toaster cashew nut gas peanut corn roaster coffee bean roasting machine is mainly used in food processing industry, beans, nuts, nuts (such as peanuts, milky white rice, boiled peanuts, melon seeds, almonds, chestnuts, broad beans) to reduce moisture drying, baking cooked products.

Technical Parameters

Model	Heart Power	Motor	Machine Size (mm)	Capacity	Weight
DGD-1	380V 22.5KW	1.1kw	2900x1450x1650	100KG/H	700kg
QGD-1	Gas 2-3kg/h	1.1kw	2900x1250x1750	100KG/H	700kg
DGD-2	380V 36-44KW	2.2kw	2900x2100x1650	200KG/H	1300kg
QGD-2	Gas 4-5kg/h	2.2kw	2900x2100x1700	200KG/H	1300kg



Roaster Machine

- ✓ Heat evenly
- ✓ Easy to use
- ✓ Easy to move



Product Description

The multi-function roasting machine is a roasting machine transformed from an ordinary roasting machine. The multi-function roasting machine adopts a horizontal drum structure. The drum heats evenly and has a heat preservation function. The drum rotates continuously when working to make the roasted food go up and down, left and right, Front and back, all-round three-dimensional stir-fry, no sticking phenomenon.

Technical Parameters

Model	Machine size(mm)	Package size (mm)	Volume /weight	Power	Voltage	Single output/chestnut
15Gas	860*430*690	920*490*890	0.4m³/45kg	90w	12V/220V	3-5kg
15Electricity	860*430*690	920*490*890	0.4m³/45kg	3.6kw	220V/50hz	3-5kg
25Gas	1060*460*730	1120*520*940	0.65m³/70kg	90w	12V/220V	7-10kg
25Electricity	1060*460*730	1120*520*940	0.65m³/70kg	4.1kw	220V/380V/50hz	7-10kg
25Gas	960*470*900	1130*540*960	0.65m³/70kg	90w	220V/50hz	7-10kg
25Electricity	960*470*900	1130*540*960	0.65m³/70kg	4.1kw	220V/380V/50hz	7-10kg
50Gas	1250*600*970	1320*670*1050	1.1m³/100kg	120w	220V/50hz	15-20kg
50Electricity	1250*600*970	1320*670*1050	1.1m³/100kg	7.32kw	220/380V/50hz	15-20kg
100Gas	1430*720*1280	1510*800*1380	1.8m³/180kg	250w	220V/50hz	30-40kg
100Electricity	1430*720*1280	1510*800*1380	1.8m³/180kg	13.5kw	380V/50hz	30-40kg
200Gas	1800*1000*1550	1900*1100*1700	3.5m³/300kg	400w	220V/50hz	50-70kg
200Electricity	1800*1000*1550	1900*1100*1700	3.5m³/300kg	20kw	380V/50hz	50-70kg
300Gas	2000*1100*1650	2100*1200*1800	4.5m³/450kg	750W	220V/50hz	70-100kg
300Electricity	2000*1100*1650	2100*1200*1800	4.5m³/450kg	30kw	380V/50hz	70-100kg
500Gas	2100*1200*1700	2200*1300*1850	6.3m³/650kg	3kw	220V/50hz	100-160kg
500Electricity	2100*1200*1700	2200*1300*1850	6.3m³/650kg	42kw	380V/50hz	100-160kg

Convection Oven

- ✓ Adjustable speed
- ✓ Automatic ignition
- ✓ Automatic temperature control
- ✓ All stainless steel structure



Product Description

The fully automatic gas-fired converter biscuits machine is made of stainless steel, and its electronic parts and power motors are made of high-standard parts and copper wire motors. Guaranteed the service life of the whole machine. Can be customized according to customer's size. Boil, bake, fry in one oven.

Technical Parameters

Model	Capacity	Size	Weight
G70	100-150pcs/h	860*860*1080mm	85kg
G90	150-240pcs/h	980*1050*1130mm	97kg
G110	240-405pcs/h	1180*1250*1130mm	120kg
GD-750	200-400pcs/h	900*900*1100mm	110kg
GD-1050	200-600pcs/h	1180*1180*1100mm	180kg
GD-1300	200-800pcs/h	1450*1450*1100mm	260kg



Rotary Oven

- ✓ Over temperature protection
- ✓ Overload protection
- ✓ Short circuit protection
- ✓ Precise temperature control



Product Description

Industrial rotary oven is a baking equipment that can bake moon cakes, cookies, bread, cakes, peach crisps, pastries and other foods. It is made of stainless steel, clean and hygienic, and has excellent thermal insulation performance. It uses hot air circulation to uniformly heat the food during food processing. It is the preferred product for food processing factories and dessert shops.

Technical Parameters

Model	Item	Voltage(V)	Power(KW)	Dimension(MM)	N.W(Kgs)	Tray size(mm)
HX-16D-01	16 trays Electric rotary oven	380V 50Hz 3N	35	190*140*250	1600	400x600
HX-16Y-01	16 trays Diesel rotary oven	380V 50Hz 3N	5	190*140*250	1600	400x600
HX-16Q-01	16 trays Gas rotary oven	380V 50Hz 3N	5	190*140*250	1600	400x600
HX-32D-01	32 trays Electric rotary oven	380V 50Hz 3N	51	255*160*250	1800	400*600/600*800
HX-32Y-01	32 trays Diesel rotary oven	380V 50Hz 3N	5	255*160*250	1800	400*600/600*800
HX-32Q-01	32 trays Gas rotary oven	380V 50Hz 3N	5	255*160*250	1800	400*600/600*800
HX-64D-01	64 trays Electric rotary oven	380V 50Hz 3N	76	280*260*250	2900	400*600/600*800
HX-64Y-01	64 trays Diesel rotary oven	380V 50Hz 3N	7	280*260*250	2900	400*600/600*800
HX-64Y-01	64 trays Gas rotary oven	380V 50Hz 3N	7	280*260*250	2900	400*600/600*800

Convection Oven

- ✓ Over temperature protection
- ✓ Overload protection
- ✓ Short circuit protection
- ✓ Precise temperature control



Product Description

An electric oven is a kitchen appliance that uses radiant heat from electric heating elements to cook food. The electric oven can be used to process some pasta, such as bread, pizza, and also can make egg tarts, small biscuits and other snacks.

Technical Parameters

Electric						
Model	Item	Voltage(V)	Power(KW)	Dimension(MM)	Temperature(°C)	Tray size(mm)
WGD-3C	3 trays	220/380	6.5	900*1290*560	20-300	400x600
WGD-4C	4 trays	220/380	6.5	900*1290*670	20-300	400x600
WGD-5C	5 trays	220/380	6.5	900*1290*780	20-300	400x600
WGD-6C	6 trays	380	6.5	900*1290*890	20-300	400x600
WGD-8C	8 trays	380	13	900*1290*1250	20-300	400x600
WGD-10C	10 trays	380	13	900*1290*1470	20-300	400x600

Gas (Automatic steam system)						
Model	Item	Voltage(V)	Power(KW)	Dimension(MM)	Temperature(°C)	Tray size(mm)
WGD-3C	3 trays	220	0.65	900*1375*560	20-300	400x600
WGD-4C	4 trays	220	0.65	900*1375*670	20-300	400x600
WGD-5C	5 trays	220	0.65	900*1375*780	20-300	400x600
WGD-6C	6 trays	220	0.65	900*1375*890	20-300	400x600
WGD-8C	8 trays	220	1.2	900*1375*1250	20-300	400x600
WGD-10C	10 trays	220	1.2	900*1375*1470	20-300	400x600



Gas Deck Oven

- ✓ Over temperature protection
- ✓ Overload protection
- ✓ Short circuit protection
- ✓ Precise temperature control



Product Description

The oven can be used to process some pasta, such as bread, pizza, and also can make egg tarts, small biscuits and other snacks.

Technical Parameters

Gas (customize the steam layer as request)

Model	Specification	Size(mm)	Power(kw)	Voltage(v)	Weight(kg)	Temperature(°C)	Tray size(mm)
HGA-20Q	1 deck 2 tray	1330*890*650	0.1	220v50hz	93.5	20-400	400x600
HGA-40Q	2 deck 4 tray	1330*890*1420	0.2	220v50hz	164	20-400	400x600
HGA-60Q	3 deck 6 tray	1330*890*1705	0.2	220v50hz	231.5	20-400	400x600

Electrical Deck Oven

- ✓ Over temperature protection
- ✓ Overload protection
- ✓ Short circuit protection
- ✓ Precise temperature control



Product Description

An electric oven is a kitchen appliance that uses radiant heat from electric heating elements to cook food. The electric oven can be used to process some pasta, such as bread, pizza, and also can make egg tarts, small biscuits and other snacks.

Technical Parameters

Model	Specification	Size(mm)	Power(kw)	Voltage(v)	Weight(kg)	Temperature(°C)	Tray size(mm)
DKL-101	1 deck 1 tray	925x570x430	3.2	220	38.5	20-300	400x600
DKL-20	1 deck 2 tray	1260x805x535	6.6	220/380	75.5	20-400	400x600
DKL-13	1 deck 3 tray	1700x805x580	8.4	380	105	20-400	400x600
DKL-202	2 deck 2 tray	925x570x760	6.4	220	89	20-300	400x600
DKL-40	2 deck 4 tray	1260x805x1100	13.2	380	135	20-400	400x600
DKL-26	2 deck 6 tray	1700x805x1100	16.8	380	190	20-400	400x600
DKL-303	3 deck 3 tray	925x570x1160	9.6	380	135	20-300	400x600
DKL-60	3 deck 6 tray	1260x805x1515	19.8	380	206	20-400	400x600
DKL-90	3 deck 9 tray	1700x805x1515	25.2	380	290	20-400	400x600
DKL-120	3deck 12tray	1700x1055x1515	38	380	380	20-400	400x600



Dough Mixer

- ✓ Easy operation
- ✓ Two-speed operation
- ✓ Large capacity
- ✓ Safety protection guard



Product Description

The appearance of the model has been redesigned, the whole part of the machine using arc design, beautiful, generous, low noise, suitable for high-quality requirements of customers to use, It's the choice of a large bakery. Food grade 304 stainless steel Barrel, solid and durable, easy to clean, equipped with protecting cover above the barrel, safe for worker.

Technical Parameters

Model	Voltage	Power	Mixing speed	Bowel capacit	Bowel speed	Size	Weight
HF10	220V/50Hz	0.55kw	185r/min	12L	16r/min	680*360*750mm	68kg
HF20	220V/50Hz	0.75kw	185r/min	22L	16r/min	690*400*740mm	76kg
HF20A	380V/50Hz	0.75/0.85kw	101/202r/min	22L	16r/min	690*400*740mm	76kg
HF30	380V/50Hz	1.1kw	185r/min	35L	15r/min	800*445*790mm	91kg
HF30A	380V/50Hz	0.85/1.1kw	101/200r/min	35L	15r/min	800*445*790mm	91kg
HF40	220V/50Hz	2.2kw	185r/min	40L	16r/min	900*500*960mm	128kg
HF40A	380V/50Hz	1.1/2.2kw	101/200r/min	40L	16r/min	900*500*960mm	128kg
HF50	220V/50Hz	2.2kw	185r/min	50L	16r/min	950*530*970mm	135kg
HF50A	380V/50Hz	1.2/2.2kw	185r/min	50L	16r/min	950*530*970mm	135kg
HF60	220V/50Hz	2.4kw	185r/min	60L	16r/min	980*560*1060mm	185kg
HF60A	380V/50Hz	1.5/2.4kw	101/200r/min	60L	16r/min	980*560*1060mm	185kg
HF80	380V/50Hz	1.5/2.4kw	101/200r/min	80L	16r/min	1100*660*1300mm	429kg
HF100	380V/50Hz	3/4.5kw	107/210r/min	100L	16r/min	1160*700*1340mm	470kg
HF120	380V/50Hz	3/4.5kw	107/210r/min	120L	16r/min	1160*700*1400mm	530kg
HF130	380V/50Hz	2.8/5.6kw	107/210r/min	130L	16r/min	1250*830*1450mm	570kg
HF200L	380V/50Hz	4/9kw	107/210r/min	200L	16r/min	1400*970*1580mm	675kg
HF240L	380V/50Hz	5/7.5kw	107/210r/min	248L	16r/min	1347*1000*1650mm	735kg
HF300L	380V/50Hz	6.5/13kw	113/220r/min	300L	16r/min	1000*1550*1750mm	1000kg

Rotary Drum Powder Mixer Machine

- ✓ Low noise
- ✓ Rotated 360 degrees
- ✓ Copper motor
- ✓ Stable and more durable



Product Description

Rotary drum powder mixer machine is a new type, high-efficiency, fine container rotation, mixing type mixing equipment, used for uniform mixing of various powdery and granular materials, with high mixing degree, and can also achieve better for ingredients with a small amount of addition Mixing degree: The machine adopts mechanical seal, the powder will not leak, and the bearing length is long; the machine has high mixing efficiency, high work efficiency, low labor intensity and convenient operation. It can be used in magnetic powder, ceramics, chemical, pharmaceutical, feed and other industries. The mixer rotates 360 degrees, rotates, and stirs.

Technical Parameters

Model	Total volume	Loading volume	Loading weight	Rotation speed	Motor power	Overall dimension	Weight
GD-5	5L	2.5L	1-3kg	18r/min	0.25kw	650*450*700mm	70kg
GD-10	10L	5L	5kg	15r/min	0.37kw	700*500*800mm	80kg
GD-20	20L	10L	10kg	15r/min	0.55kw	800*500*1000mm	90kg
GD-30	30L	15L	15kg	15r/min	0.55kw	900*500*1000mm	100kg
GD-50	50L	25L	25kg	12r/min	0.75kw	1200*500*1300mm	150kg
GD-100	100L	50L	40kg	10r/min	0.75kw	1400*550*1500mm	180kg
GD-200	200L	100L	80kg	10r/min	1.1kw	1500*700*1600mm	250kg
GD-300	300L	150L	120kg	10r/min	1.5kw	1700*800*1850mm	350kg
GD-500	500L	250L	200kg	0-9r/min	2.2kw	2000*950*1950mm	550kg
GD-800	800L	400L	300kg	0-9r/min	3.0kw	2200*1100*2100mm	850kg
GD-1000	1000L	500L	400kg	0-8r/min	4.0kw	2400*1200*2200mm	1000kg
GD-1500	1500L	750L	600kg	0-8r/min	5.5kw	2800*1400*2400mm	1200kg
GD-2000	2000L	1000L	800kg	0-8r/min	7.5kw	3000*1550*2600mm	1600kg
GD-3000	3000L	1500L	1000kg	0-8r/min	11kw	3500*1900*2800mm	2500kg
GD-4000	4000L	2000L	1500kg	0-6r/min	15kw	3900*2000*2900mm	3200kg

Hydraulic oil press machine

- ✓ High pressure
- ✓ High productivity
- ✓ One click to start
- ✓ Suitable for multiple materials



Product Description

Hydraulic oil press machine is a multi-functional oil pressing machine suitable for hot pressing and cold pressing. It is mainly composed of the main body, transmission hydraulic device, electrical control part and other main parts. Hydraulic oil press machine can used to press more than 20 kinds of oil crops such as olives, peanuts, sesames, rapeseeds, soybeans, sunflowers, and flax. It has the advantages of high oil yield, good quality finished oil, saving time and effort.

Technical Parameters

Model	Capacity	Power	Dimension	Weight
GD-HOPM-150	12kg/h	0.75kw	700*800*780mm	240kg
GD-HOPM-180	25-35kg/h	1.5kw	800*900*1050mm	450kg
GD-HOPM-230	50-60kg/h	1.5kw	900*1000*1400mm	850kg
GD-HOPM-260	75-85kg/h	3kw	1050*1100*1550mm	1200kg
GD-HOPM-320	105-115kg/h	3kw	1120*1200*1650mm	1800kg
GD-HOPM-360	135-150kg/h	3kw	1200*1200*1680mm	2100kg
GD-HOPM-420	180-200kg/h	3kw	1250*1250*1700mm	2300kg

Automatic Spiral Oil Press Machine

- ✓ Food grade 304 stainless steel
- ✓ High oil yield and oil residue separation
- ✓ Stable and more durable
- ✓ Automatic temperature control



Product Description

Automatic spiral oil press machine is mainly composed of electric control, automatic heating, adjustment, transmission and vacuum oil filter components. It is to separate the oil from oil bearing materials by the pressing power which comes from the change of chamber volume, drive from screw worm, resistance of curve teeth at press rings and extrusion friction between oil materials. Under the big pressure created in press chamber, the oil can be discharged from gap of press bars and oil trough of press rings. Either big scale and small scale of screw oil expeller, they have similar theories in screw expeller pressing.

Technical Parameters

Model	Handling capacity	Main engine configuration power	Heater power	Diameter of internal circle of pressing chest	Speed of squeezing worms	Diameter of squeezing worms	Dimension	Weight
GD-60	30-40kg/h	2.2kw	1.5kw	55mm	53mm	36r/min	1360*950*1170mm	290kg
GD-85	80-160kg/h	5.5-6kw	3kw	82mm	80mm	60r/min	1700*1300*1600mm	590kg
GD-120	260-400kg/h	6-11kw	4kw	122mm	120mm	36r/min	2050*1550*1800mm	1000kg
GD-1688	150-260kg/h	6-7.5kw	3.5kw	102mm	100mm	40r/min	2000*1400*1750mm	950kg
GD-150	400-500kg/h	22kw	5kw	150mm	148mm	36r/min	2200*1460*1750mm	1800kg



Universal Powder Grinder Machine

- ✓ All stainless steel body
- ✓ High output powder speed
- ✓ Low noise and good crushing efficiency



Product Description

The universal powder grinder is made of high-quality 304 stainless steel and is equipped with a national standard motor. It is mainly used for chemical materials, Chinese herbal materials containing tree roots, branches and block materials, various grains with low oil content, whole grains and other hard and brittle materials.

Technical Parameters

Type	Capacity (kg/h)	Spindle speed(rpm)	Feeding size(mm)	Crushing fineness(mesh)	Motor(kw)	Overall size(mm)	Weight (kg)
15B	20-150	6000	<10	20-120	2.2	550x400x850	150
20B	40-200	4500	<10	20-120	4	550x600x1250	280
30B	80-400	3800	<12	20-120	7.5	600x700x1450	340
40B	100-800	3400	<15	20-120	11	800x900x1550	450
50B	150-1000	3000	<18	20-120	15	850*1050*1750	600
60B	250-1500	2800	<20	20-120	22	900x1100x1880	900
80B	350-2000	2400	<25	20-120	30	1200x950x1960	1250
100B	500-3000	2000	<28	20-120	37	1350x1000x2100	1580

Candy Coating Machine

- ✓ Automatic liquid spray
- ✓ Heating inside and outside
- ✓ Temperature controllable



Product Description

This candy coating machine is mainly used for the pharmaceutical industry in the compaction of the tablets, pills, and coated particles can also be used in the food industry in the mechanism or candy coating.

The sugar-coated tablet coated with a shiny polished surface to prevent oxidation, moisture, or volatile, but also covers the peculiar smell of tablet core, makes it easy for distinguishing and dissolving in human stomach intestine system.

Technical Parameters

Model	Pot diameter	Rotating speed	Main motor power	Blower power	Heating wire power	Productivity	Dimension	Net weight
GDJ-400A	400mm	50r/min	0.37KW	40W	1KW	2-5kg/batch	770*670*840mm	70kg
GDJ-600A	600mm	50r/min	0.75KW	120W	2KW	8-15kg/batch	930*620*1140mm	120kg
GDJ-800A	800mm	50r/min	1.5KW	200W	2KW	30-50kg/batch	1100*800*1600mm	180kg
GDJ-1000A	1000mm	50r/min	2.2KW	250W	4KW	50-70kg/batch	1200*1200*1600mm	260kg
GDJ-1250A	1250mm	50r/min	2.2KW	370W	4KW	80-150kg/batch	1350*1350*1600mm	360kg

Pet Feed Puffing Machine

- ✓ Cooked food
- ✓ Taste delicious
- ✓ Stable operation
- ✓ Balanced nutrition



Product Description

The pet food puffing machine uses corn, soybean (soybean cake), animal scraps, etc. as raw materials. It can be extruded directly into the machine to produce different particles. The shape is novel, the taste is unique, the nutrition is rich, and the structure is good. It is suitable for dogs, cats, fish, birds, rabbits, shrimps, cats, minks, foxes and other feeds for different pet tastes. Suitable for professional farmers, small and medium feed mills and laboratories. Under the condition of the same feed formula, the cost of homemade extruded feed is 60%-80% lower than the market price; the extruded feed particles produced by this machine are neat and smooth, and the floating water surface does not sink for more than 12 hours, do not pollute the water source, and can be sterilized, reduce fish disease

Technical Parameters

Model	Productivity (t/h)	Main engine power(kw)	Feeding power (kw)	Spiral diameter (mm)	Cutting power (kw)	Packing size (mm)	Weight (kg)
GD-40	0.04-0.05	5.5kw (220V)	0.4	Φ40	0.4	1360*1600*850	350
GD-50	0.08-0.08	11kw (380V)	0.4	Φ50	0.4	1360*1600*850	350
GD-60	0.12-0.15	15	0.4	Φ60	0.4	1360*1600*850	450
GD-702	0.12-0.15	18.5	0.4	Φ70	0.4	1360*1600*850	490
GD-703	0.20-0.25	18.5	0.4	Φ70	0.4	1360*1600*850	490
GD-80	0.30-0.35	22	0.55	Φ80	0.55	1360*1950*840	600
GD-100	0.4-0.5	37	1.1	Φ90	1.5	1800*2600*1150	800
GD-135	0.75-0.80	75	1.1	Φ130	2.2	2200*2800*1200	950
GD-120	0.60-0.70	55	1.1	Φ120	2.2	2200*2800*1200	950
GD-160	1.00-1.20	90	1.5	Φ160	2.2	2300*3000*1200	1200
GD-200	1.80-2.00	110	2.2	Φ160	2.2	2400*3200*1400	1450

Model	JK50	JK100	JK200	JK300	JK400	JK500	JK600
Capacity (L)	50	100	200	300	400	500	600
Diameter (mm)	600	700	800	900	1000	1100	1200
Depth (mm)	450	500	550	600	650	700	750
Electric power (kw)	15	18	18	24	27	36	36
Heating area (m³)	0.53	0.87	1.23	1.65	1.99	2.21	2.43
Mixing speed	24r/min(Customizable)						

Egg Grading Machine

- ✓

High standards
- ✓

Strict requirements
- ✓

True quality
- ✓

One-stop solution from design to manufacturing



Product Description

The automatic egg weight classifier can automatically distribute the eggs to different collection baskets according to the weight of the eggs. The equipment has the characteristics of reliable performance, convenient operation, high efficiency, and the eggs are not easily broken during the grading process.

Technical Parameters

Model	GD-101B
Material	304SS
Speed	4000pieces/h
Accuracy	g
Grade	7
Power	0.218kw
Voltage	220V, 50Hz
Dimension	1.7*1.45*1m
Function	Manual egg laying, LED light inspection, weight grading

Egg White Yolk Separating Machine

- ✓ Detachable and easy to clean
- ✓ High separation rate of egg liquid
- ✓ Production can reach 4500-5500pcs/h



Product Description

Our egg white yolk separating machine is the perfect tool to separate egg whites and yolks with ease and precision. Egg white yolk separating machine aims to simplify your cooking and baking experience, ensuring accurate separation every time, allowing you to easily create a variety of delicious recipes. Egg white yolk separating machine with its user-friendly design, efficient operation, easy to clean, is any home cook or professional chef essential tools.

Technical Parameters

Model	Voltage	Power	Output	Weight	Size
GD-2.7K	220V	250W	2700pcs/h	1270*920*1120mm	380kg
GD-5.4K	220V	250W	5400pcs/h	1270*920*1120mm	380kg
GD-8.1K	220V	250W	8100pcs/h	1270*920*1120mm	380kg
GD-10.8K	220V	250W	10800pcs/h	1270*920*1120mm	380kg



Feed Processing Machine

- ✓ Durable
- ✓ Precision machining
- ✓ High efficiency
- ✓ Pure copper motor



Product Description

This animal feed/food pellet making machine can be used for processing livestock, poultry and aquatic feed pellets, such as dog pellets and chicken pellets, which is specially suitable for medium feed factory, breed farm or aquatic base. It has the better raw material versatility, which can be suitable for pelletizing many kinds of raw material. And also, this manufacturing plant for animal feed has the features of low energy consumption and high production efficiency for larger profits.

Technical Parameters

Model	Output (kg/h)	Voltage (V)	Power (kw)	Weight (kg)	Size (cm)
GD-125	60-80	220/380	4	0-2	75*32*70
GD-150	90-100	220/380	4	0-2	78*33*77
GD-160	100-150	220/380	4.5	0-2	80*34*78
GD-180	150-200	220/380	4.5	0-2	90*38*85
GD-210	200-300	380	7.5	0-2	100*43*95
GD-230	300-400	380	11	0-2	118*58*112
GD-260	500-600	380	18.5	0-3	126*46*115
GD-300	700-900	380	22	0-3	138*55*125
GD-400	1000-2000	380	30	4-6	160*80*170

Vacuum Meat Tumbler

- ✓ Stainless steel body
- ✓ Large rolling space
- ✓ Stable operation
- ✓ Easy to operate



Product Description

used for processing meat, such as beef, mutton, chicken, duck, goose, pork, fish, eggs, vegetables, fruits, etc. It maximizes seasoning and retains the moisture in the meat.

Technical Parameters

Model	Capacity(kg/tank)	Power(kw)	Weight(kg)	Machine size (mm)
GR-30	15	0.75	70	850*360*780
GR-50	25	0.95	100	906*500*808
GR-100	50	1.3	150	1060*600*980
GR-200	70	2.25	240	1400*800*1280
GR-300	100	2.25	260	1410*1000*1450
GR-500	240	2.25	300	1500*1020*1640
GR-600	225-300	2.25	350	1560*1020*1640
GR-800	300-400	2.95	460	1800*1200*1600
GR-1600	600-800	3.75	975	2150*1330*2000
GR-2000	750-1000	3.75	1090	2200*1440*2010
GR-2400	1200	5	1300	2400*1500*2100



Peanut Peeling Machine

- ✓ High efficiency
- ✓ Clean and sanitary
- ✓ Easy to operation



Product Description

This machine peels the red coat of peanuts by rolling and peeling. It has the advantages of stable and reliable performance, long service life, good peeling effect, high productivity, low half-grain rate and good quality. It is suitable for processing peeled peanuts of various specifications and so on.

Technical Parameters

Model	Fan power	Capacity	Size	Weight
GD-1	0.55kw	200-250kg/h	1200*500*1200mm	110kg
GD-2	0.75kw	400-500kg/h	1200*750*1200mm	200kg
GD-3	1.1kw	600-750kg/h	1200*1050*1200mm	280kg
GD-4	1.5kw	800-1000kg/h	1200*1400*1200mm	360kg

Egg Washing Machine

- ✓ Different sizes to choose
- ✓ Safety lever
- ✓ Saw band stability
- ✓ Precise temperature control



Product Description

The automatic egg washer can clean and dry fresh eggs (chickens and ducks), preserved eggs, gray eggs, mud eggs, salted eggs, etc. In the egg cleaning equipment industry, our egg washing machine has superior performance. It improves work efficiency, reduces energy consumption, reduces labor intensity, and has beautiful appearance and low noise. It is a high-quality product worthy of customers' trust and choice.

Technical Parameters



EG-01



GD-1



GD-2

Egg washing machine				
Model	Capacity	Size(mm)	Weight	Power
GD-70	3KW(single-phase,220V)	650x320x650	70kg	60-80kg/h

Water cycle egg washing machine					
Model	Row number of cleaning	Capacity	Size(mm)	Weight	Power
GD-1	single row	2000 pcs/h	800*470*710mm	60kg	370w
GD-2	double row	4000 pcs/h	720*430*650mm	77kg	550w

With immersible pump. Machine with stainless steel materials



Colloidal Mill Machine

- ✓ Convenient operation
- ✓ Large capacity
- ✓ High efficiency
- ✓ Simple operation



Product Description


The frozen meat dicing machine is made of food-grade stainless steel with simple structure. The cutter adopts double-edged cutting, which has high working efficiency. The blade is specially treated, sharp and durable, and it is an excellent equipment in food processing.

Technical Parameters

Model	Voltage	Size(mm)	Weight	Capacity
GD-70	3KW(single-phase,220V)	650x320x650	70KG	60-80KG/H
GD-80	5.5KW(three-phase ,380V)	800x350x800	170KG	100-150KG/H
GD-130	11KW(three-phase ,380V)	1000x350x1000	270KG	200-300KG/H
GD-180	30KW(three-phase ,380V)	1200x450x1200	470KG	500-800KG/H
GD-200	37KW(three-phase ,380V)	1250x500x1200	500KG	800-1000KG/H

Peanut butter production line

- ✓ Easy operation
- ✓ More hygienic
- ✓ Fully enclosed production
- ✓ High production capacity

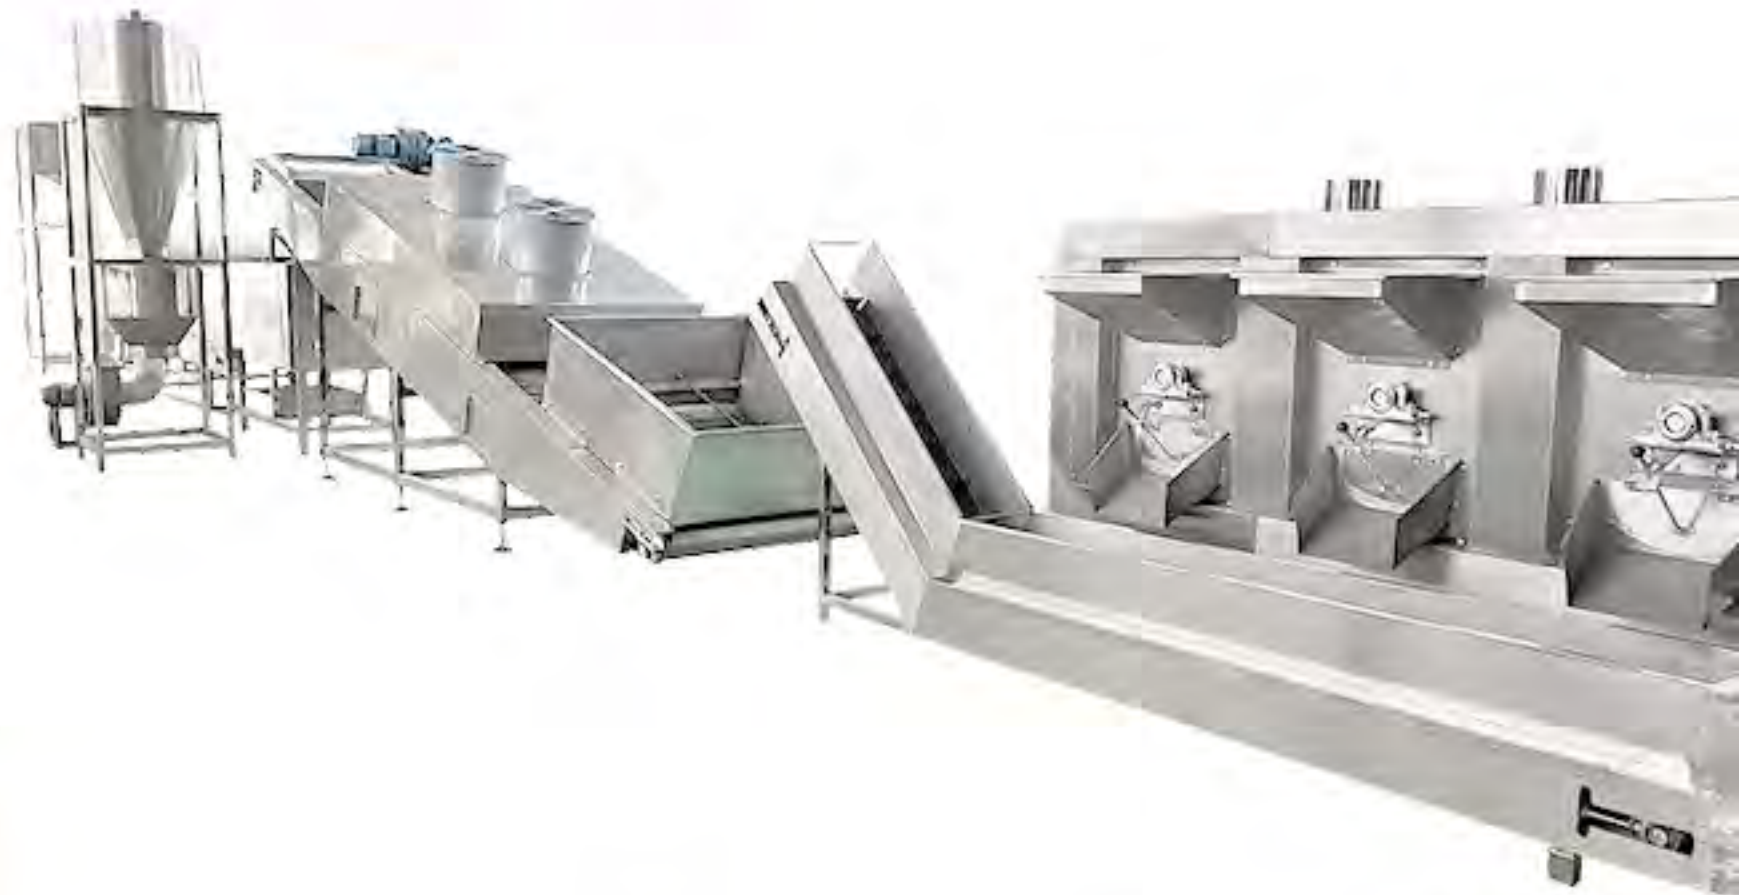

Product Description

The peanut sesame production process and main equipments of the production line include oven, peeling and semi-granular machine, sorting belt, feeder, coarse grinding machine, mixing tank, conveying pump, mixer, homogenizer, fine grinding machine, vacuum tank and cooling machine, filling machine, etc. It is characterized by flowing water, high degree of mechanization, good reliability, fully enclosed production and no pollution. It is an advanced equipment for producing stable peanut butter.

Technical Parameters

Machine	Size	Power
Roasting machine	2600*3500*1650mm	5.5kw
Cooling line	600*800*1600mm	3.5kw
Peeling and crushing machine	1100*750*1100mm	0.37kw*2
Conveyor	4000*600*500mm	0.75kw
Lifting machine	3000*600*800mm	0.75kw
Grinding machine	950*400*980mm	11kw
Cooling Storage tank	φ1000*2000mm	3kw
Storage tank	φ1000*2000mm	22kw
Filling machine	Equipment name: semi-automatic filling machine Output: 100-400 bottles/hour	1kw

Vacuum Packaging Machine



Single chamber vacuum packaging machine



Double chamber vacuum packaging machine



- ✔ Wide application
- ✔ Good vacuum effect

- ✔ Long service life
- ✔ Microcomputer control

Product Description

The vacuum packaging machine can automatically extract the air in the packaging bag, and complete the sealing process after reaching the predetermined vacuum degree. Vacuum packaging machines are often used in the food industry, because after vacuum packaging, food can resist oxidation, so as to achieve the purpose of long-term preservation.

Technical Parameters

Model	Size	Voltage	Power
GD-400	550*500*950	110v/220v	0.2KW
GD-500	650*580*1000	110v/220v	0.2KW
GD-600	750*680*1000	110v/220v	0.9KW

Multi-function Packing Machine

- ✓ Anti wear pulley
- ✓ Easy Control Touch Screen
- ✓ Servo control tool end seal



Product Description

Applicable for packing various regular objects, such as biscuits, pie, chocolate, bread, instant noodle ice cream, moon cake, large packets of paper towels, sanitary napkins, hardware, paper boxes, plates, vegetables, etc.


Technical Parameters

Model	XZL-250	XZL-320	XZL-350	XZL-450	XZL-600
Width of the film	Max250mm	Max320mm	Max350mm	Max450mm	Max600mm
Length of the bag	65-190/120-280 90-220mm	5-190/120-280 90-220/150-330mm	65-190/120-280 90-220/150-330mm	130-450mm	120-500mm
Width of the bag	30-110mm	50-160mm	50-160mm	50-180mm	100-280mm
Products are highly	Max.40-55mm	Max.40-60mm	Max.40-60mm	Max.75mm	Max.110mm
Roller diameter	Max.320mm	Max.320mm	Max.320mm	Max.320mm	Max.320mm
Packing speed	40-230bag/min	40-230bag/min	40-230bag/min	30-150bag/min	30-150bag/min
Power	2.4kw	2.6kw	2.6kw	3.2kw	3.6kw
Size	3770*670*1450	3770*720*1450	4020*770*1450	4020*820*1450	4020*920*1460
Weight	450kg	500kg	580kg	650kg	680kg
Optional configuration	Code punching machine inflatable device cake falling machine material handling machine				
Packaging materials	Such as single heat seal BOPP/ composite film.Such as OPP composite PE PET composite PEE				
Bag shape	Back seal packaging (round hole and butterfly hole can be customized)				
Transverse seal edge grain	Mesh type sealing, stripe type sealing, knife edge serrated mouth,flat mouth plus V easy to tear				



Vertical Granules Packing Machine

- ✓ Stable and more durable
- ✓ High sealing efficiency
- ✓ Food grade 304 stainless steel
- ✓ High sensitivity and low noise
- ✓ High sealing and no air leakage

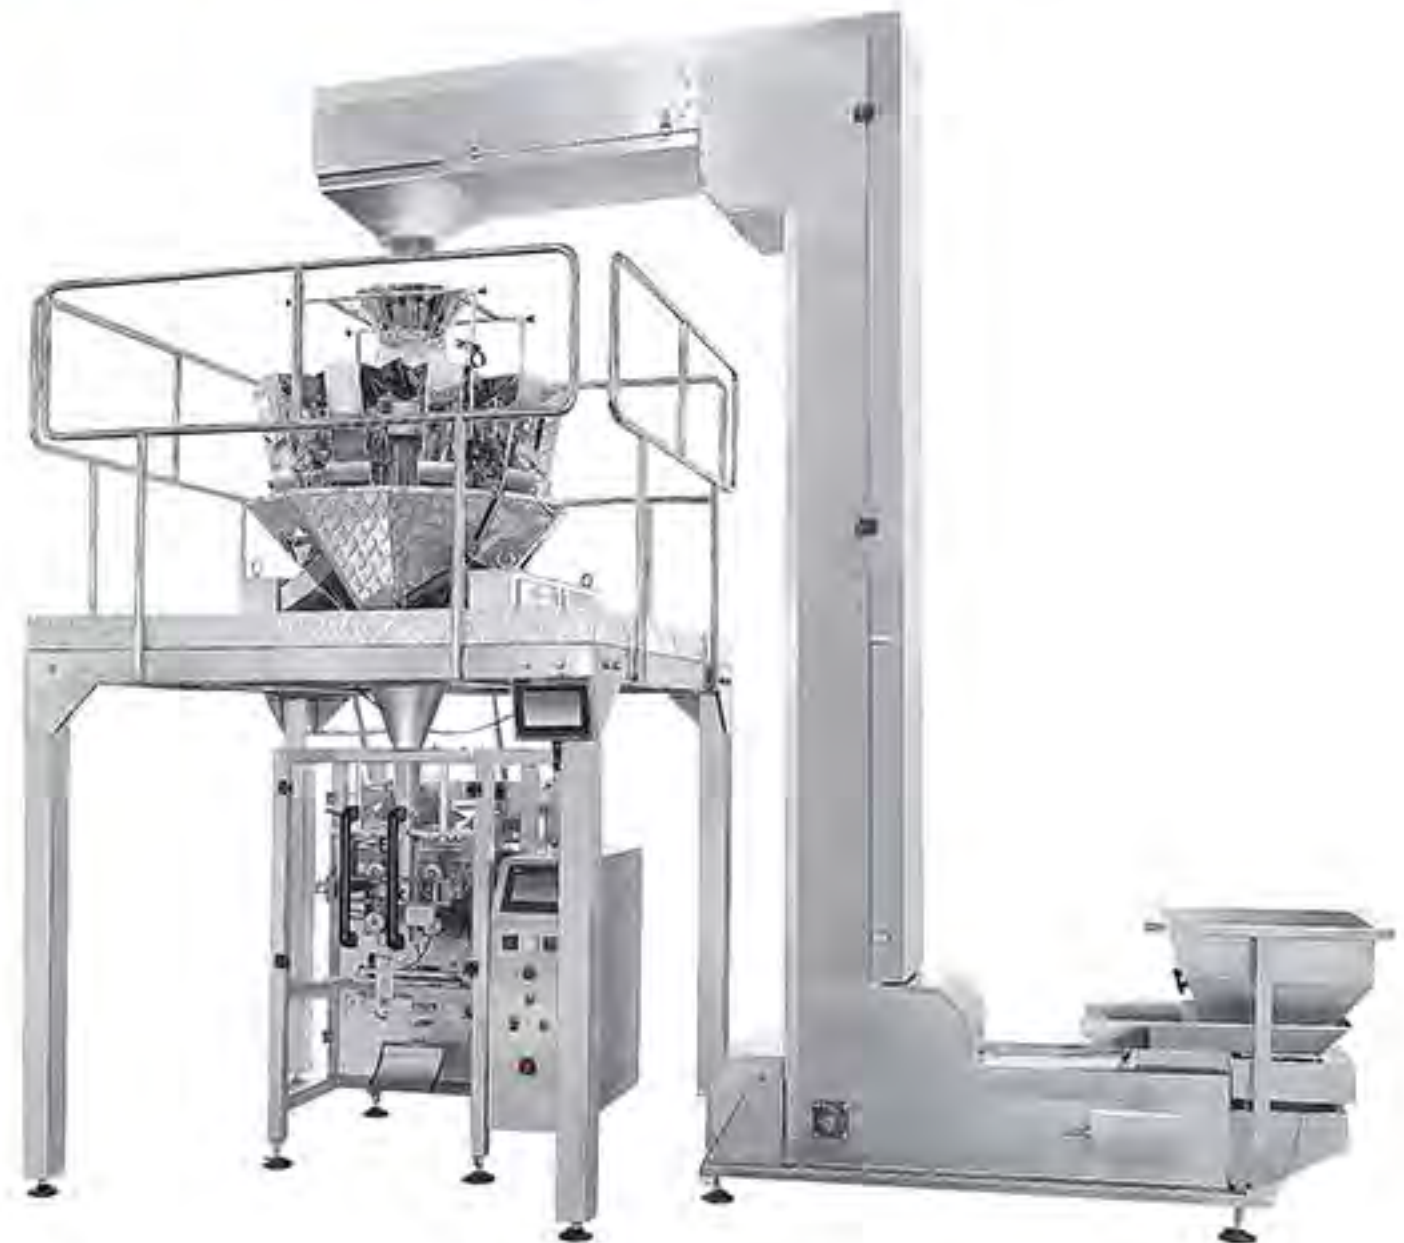

Product Description

The master control circuit of our vertical granules packing machine adopts imported PLC microcomputer with man-machine interface and frequency control, making setting parameters (to adjust bag length and width, packing speed, cutting position) convenient and quick and operation intuitive. Full implement the humanizes automatic operation.

Technical Parameters

Model	GD-420	GD-520/GD-520T	GD-720	GD-820	GD-920
Packing speed	10-50bag/min	10-50bag/min	10-40bag/min	10-40bag/min	10-40bag/min
Bag-making size	(L)80-300mm (W)80-200mm	(L)80-350mm (W)80-250mm	(L)100-500mm (W)160-350mm	(L)100-500mm (W)200-400mm	(L)100-500mm (W)220-450mm
Bag-making type	Stand-up bag type, punching device	Stand-up bag type, punching device	Stand-up bag type, punching device	Stand-up bag type, punching device	Stand-up bag type, punching device
Filling range	80-2000ml	150-2000ml	150-4000ml	150-5000ml	150-6000ml
Max film width	420mm	520mm	720mm	820mm	920mm
Bags' thickness	0.04-0.08mm	0.04-0.08mm	0.04-0.08mm	0.04-0.08mm	0.04-0.08mm
Air consumption	0.3m ³ /min 0.65Mpa	0.3m ³ /min 0.65Mpa	0.3m ³ /min 0.65Mpa	0.3m ³ /min 0.65Mpa	0.3m ³ /min 0.65Mpa
Power	2.2KW/220V 50-60HZ	4KW/220V 50-60HZ	3KW/220V 50-60HZ	3KW/220V 50-60HZ	3KW/220V 50-60HZ
Size of machine	1320*950*1360mm	1430*1200*1700mm	1716*1260*1820mm	1854*1440*2019mm	2014*1574*2095mm
Weight of machine	300kg	500kg	550kg	600kg	700kg

Horizontal Mixer

- ✓ Mix well
- ✓ Good sealing
- ✓ Small footprint



Product Description

Horizontal mixer is a professional for all kinds of granules, powders, flakes and particles of uniform mixing needs of efficient equipment. The machine adopts horizontal body and spiral belt mixing, which has the advantages of small floor space, easy operation, simple maintenance, high uniformity, small residue, good sealing, no vibration, small dust, etc.

Technical Parameters

Model	Capacity	Size of mixing tank(m)	Thickenss of machine's body	Thickness of the ribbon	Power(kw)	Reductor
GD-300	300L	1.05*0.5*0.6	2mm	6mm	3	200
GD-500	500L	1.2*0.65*0.7	2mm	6mm	4	250
GD-700	700L	1.22*0.73*0.85	2mm	8mm	5.5	250/350
GD-1000	1000L	1.5*0.8*0.95	2mm	8mm	7.5	350
GD-1500	1500L	1.8*0.9*1.05	2mm	8mm	7.5	350
GD-2100	2100L	2*1*1.15	2mm	8mm	11	350
GD-3200	3200L	2.2*1.2*1.35	2mm	8mm	11-15	350
GD-4300	4300L	2.5*1.26*1.45	2mm	8mm	15-18.5	350
GD-6400	6400L	2.9*1.5*1.65	4mm	8mm	22	500
GD-8000	8000L		4mm	10mm	37	650
GD-10M	10M²	3.7*1.6*1.9	4mm	12mm	37	650
GD-10M-2	10M²		6mm	12mm	37	650
GD-15M	15M²	4.5*1.85*2.05	6mm	12mm	45	750

You can customize 201 bracket carbon steel, all 201, contact 304 bracket 201, all 304 materials



Water Well Drilling Rig

- ✓ 150m deep drilling
- ✓ Opening diameter 300mm
- ✓ Simple operation, easy to move



Civil draft well



Engineering Dewatering Well



Industrial water well



Drought resistant well



Product Description

Water well drilling rig is suitable for soil layers, quicksand layers and a small amount of rock layers. It is mainly used for drilling civil draft wells, irrigation wells, ground source heat pump air conditioning wells, dewatering wells, small foundation piles, and sound measuring pipes.

Technical Parameters

Model	GD-240
Drill pipe diameter	51mm
Dimension	145155*197cm
Drill pipe length	1.5m
Weight	200kg
Drill pipe replacement method	Automatic lever release, manual lever change
Drilling method	Rotary cutting
Drilling depth	120m
Drilling diameter	Φ100mm-Φ240mm
Lift height	The highest point of the machine is 2.5 meters
Lifting force	1000kg

HENAN GONDOR MECHANICAL

 **Tel:** +8617324804737

 **E-mail:** inquiry@gondormachine.com

 **Website:** <http://www.gondormachine.com>

